

## SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3  
0045200



### Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP4 = 4 core), sheet steel, 2812LM, 26W, 108lm/W, 4000K, drive current: 350mA, CRI 80, 138° wide beam angle, electronic driver (non dimmable), integral 3 hour maintained emergency, IP20, IK07, 50,000 hrs (L70), (LxWxH) 1205x66x76mm, 5 step MacAdam ellipse, 3kg, white RAL9016, Class 1, 220-240V, energy class: A++, A+, A.



### PRODUCT OVERVIEW

Product name	SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	2812
Luminaire efficacy (lm/W)	100.42
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	138
Glare control	< 29
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	450
Total power consumption (W)	28
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288452005

## SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3  
0045200

### DATA TABLE

#### General data

Product name	SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	0°C - 25°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	5 years

#### Optical data

Fixture luminous flux (lm)	2812
Luminaire efficacy (lm/W)	100.42
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	138
Distribution type	Symmetric
Glare control	< 29
Photobiological Risk Group	RG0
Luminous flux (emergency) (lm)	450
Emergency duration (h)	3

#### Electrical data

Total power consumption (W)	28
Mains voltage (V)	220-240V~
Lamp power factor	0.95
THD (at 230 V, 50 Hz, full load, at 100% dimming level) = xx.x %	10
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Transformer required	Yes
Dimmable	No
Drive current (mA)	350
Inrush Current (A)	25
Inrush Duration (µs)	177
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50Hz
LED Flickering Rate	Medium (21% - 40%)

## SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3  
0045200

Max. Luminaires per 10A C Breaker	32
Max. Luminaires per 13A C Breaker	42
Max. Luminaires per 16A C Breaker	53
Max. Luminaires per 20A C Breaker	66

### Lifetime data

Lifespan L70 B50	50000
Lifespan L70 B20	30000
Lifespan L70 B10	15000
Lifespan L80 B50	30000
Lifespan L80 B20	30000
Lifespan L80 B10	15000
Lifespan L90 B50	15000
Lifespan L90 B20	15000
Lifespan L90 B10	15000

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	1205
Nominal Product Width (mm)	66
Nominal Product Height (mm)	76
Weight (kg)	3.196

### Packaging

Single packaging type	Carton
Product EAN number	5410288452005
Packaging single length / height (cm)	124.2
Packaging single width (cm)	8.1
Packaging single depth (cm)	9.2
DUN14 (outer)	05410288452005
Units per outer package	1
Packaging outer length / height (cm)	124.2
Packaging outer width (cm)	8.1
Packaging outer depth (cm)	9.2


### Safety data

Optimal operating condition (°C)	0-25
----------------------------------	------

## PHOTOMETRY

## SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3  
0045200

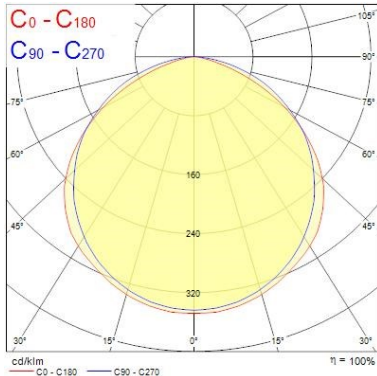

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.53 1.51	3511	56.8° 286	56.8° 286	596
1.0	3.06 3.02	873	56.8° 71	56.8° 71	149
1.5	4.58 4.53	390	56.8° 32	56.8° 32	86
2.0	6.11 6.04	219	56.8° 18	56.8° 18	50
2.5	7.64 7.55	140	56.8° 11	56.8° 11	35
3.0	9.17 9.07	96	56.8° 8	56.8° 8	24

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 113.0°)  
— C90 - C270 (Half beam angle: 113.0°)

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.21 2.66	3168	50.4° 405	69.4° 89	596
1.0	2.42 5.32	791	50.4° 101	69.4° 71	149
1.5	3.63 7.98	352	50.4° 46	69.4° 32	86
2.0	4.84 10.64	196	50.4° 26	69.4° 18	50
2.5	6.04 13.30	127	50.4° 16	69.4° 11	35
3.0	7.25 15.96	88	50.4° 11	69.4° 8	24


Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 130.0°)  
— C90 - C270 (Half beam angle: 100.0°)

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.21 2.66	507	50.4° 65	69.4° 11	596
1.0	2.42 5.32	127	50.4° 16	69.4° 3	149
1.5	3.63 7.98	56	50.4° 7	69.4° 1	86
2.0	4.84 10.64	32	50.4° 4	69.4° 1	50
2.5	6.04 13.30	20	50.4° 3	69.4° 1	35
3.0	7.25 15.96	14	50.4° 2	69.4° 1	24

Distance [m]    Cone diameter [m]    Illuminance [lx]



— C0 - C180 (Half beam angle: 130.0°)  
— C90 - C270 (Half beam angle: 100.0°)

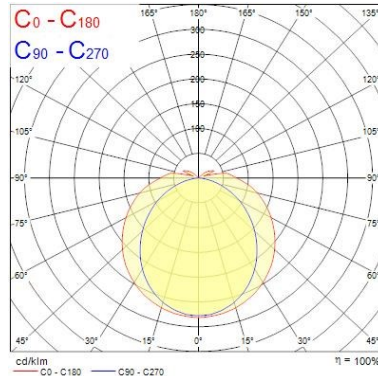

Distance [m]	Cone diameter [m]	E(0°)	E(C90)	E(C0)	Illuminance [lx]
0.5	1.53 1.51	596	56.8° 46	56.8° 32	596
1.0	3.06 3.02	149	56.8° 12	56.8° 13	149
1.5	4.58 4.53	86	56.8° 8	56.8° 8	86
2.0	6.11 6.04	50	56.8° 5	56.8° 5	50
2.5	7.64 7.55	35	56.8° 3	56.8° 3	35
3.0	9.17 9.07	24	56.8° 2	56.8° 2	24

Distance [m]    Cone diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 113.0°)  
— C90 - C270 (Half beam angle: 113.0°)

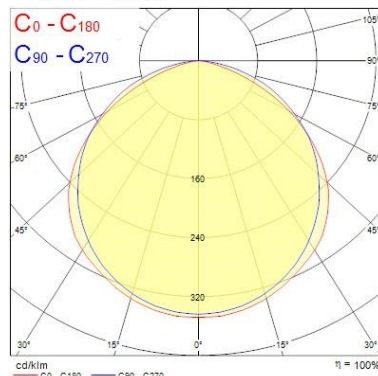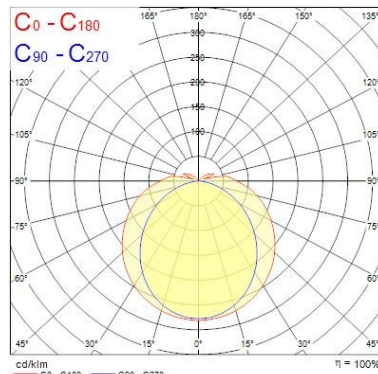

## SylBatten LED

SYLBATTEN LED 1205MM 3000LM 4000K EB (TP4) E3

0045200

### TECHNICAL DRAWINGS

