

## START eco Surface IP44

START ECO SURFACE IP44 DUAL TONE 1500LM 830/40 DIM

0043122



### Product features

- Ceiling / wall luminaire with integrated LED. Perfect solution for hallways, circulation spaces or foyer. Even and uniform light distribution with a halo lighting effect on the wall surface. Body Size diameter 330mm. Power 18W, output 1500 lumens. Supplied with LED driver (leading edge/trailing edge dimmable) and color light temperature switch that enables to choose between 3000K and 4000K. IK03 PMMA diffuser. Low maintenance with 30,000 hours LED life expectancy




### PRODUCT OVERVIEW


Product name	START ECO SURFACE IP44 DUAL TONE 1500LM 830/40 DIM
Technology	LED
Housing	Aluminium
Mount	Ceiling surface mounting
Environment	Indoor
General application	Residential & Consumer
ETIM Class	EC002892
E-number FI	4170566
Warranty	3 years
Fixture luminous flux (lm)	1500
Luminaire efficacy (lm/W)	83
Colour temperature (K)	4000
Light colour	Amber White or Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	5
Beam Angle (°)	120
Glare control	< 28
Photobiological Risk Group	RG1
Total power consumption (W)	18
Electrical protection	Class I
Dimmable	Yes
Minimum dimming level (%)	10
Housing colour	White
IP rating	IP44
IK rating	IK03
Product EAN number	5410288431222

### PHOTOMETRY

## START eco Surface IP44 START ECO SURFACE IP44 DUAL TONE 1500LM 830/40 DIM 0043122

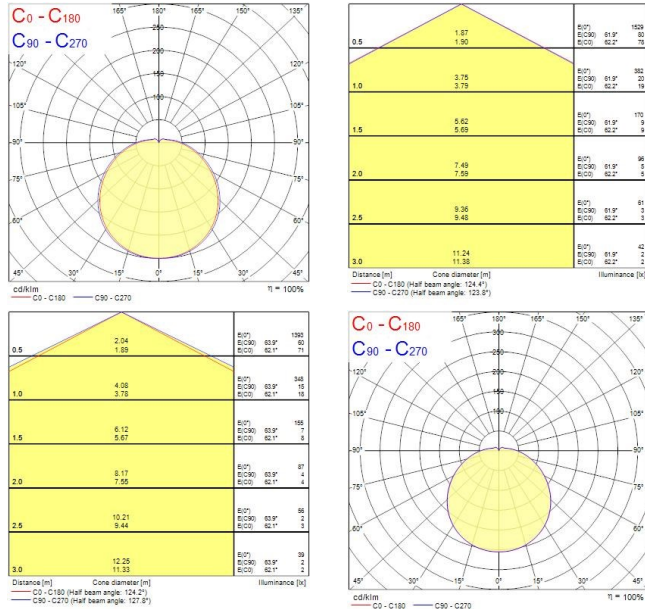

### TECHNICAL DRAWINGS



Version	Ø	H
6W	180	75
12W	250	80
17/18W	330	96
24W	360	100