

Expospot 90 adjustable - Sylvania


EXPOSPOT 90 ADJUSTABLE HO RA90 4000K MB WHITE

0060295



Product features

- Integrated LED adjustable accent downlight, single head, ideal for retail and display applications, die-cast aluminium body, passive cooling, beam angle: 43°, optics: aluminium reflector and lens combination, colour temperature: 4000K neutral white, total system power: 35W, total fixture output: 3458lm, 99lm/W, LOR: 100%, colour rendering: Ra 90 typical, LED Chromacity: 3 step MacAdam ellipse, lifetime: 60,000 hours at 70% of the original output (L70B50), energy class: A++, A+, A, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, electrical protection: CLASS II, ingress protection rating: IP20, suitable for internal environment only, ceiling cut-out: 140mm, dimensions: 150x104mm, weight: 0.77kg.


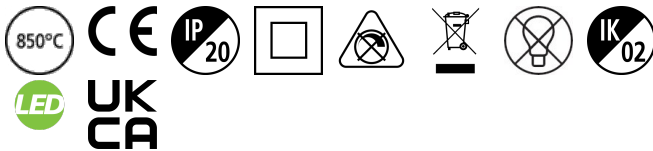


PRODUCT OVERVIEW

| | |
|---------------------------------|---|
| Product name | EXPOSPOT 90 ADJUSTABLE HO RA90 4000K MB WHITE |
| Technology | LED |
| Housing | Aluminium |
| Mount | Ceiling recessed mounting |
| Environment | Indoor |
| General application | Retail |
| ETIM Class | EC001744 |
| E-number FI | 4274792 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 3458 |
| Luminaire efficacy (lm/W) | 99 |
| LOR (%) | 100 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 90 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 43 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 35 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Control gear mounting | Remote |
| Dimmable | No |
| Housing colour | White |
| IP rating | IP20 |
| IK rating | IK02 |
| Product EAN number | 5410288602950 |

PHOTOMETRY

Expospot 90 adjustable - Sylvania EXPOSPOT 90 ADJUSTABLE HO RA90 4000K MB WHITE 0060295



TECHNICAL DRAWINGS

