

Insaver LED II 150

Insaver LED II 150 High Output WW DALI E3

3098126



Product features

- Circular LED downlight with up to 114lm/W efficacy and 2,400 luminaire lumen output. Innovative easy installation system allows for a rapid, single point installation. For 150mm cut outs. IP44 or UGR<19 compliant with additional accessories. 3 hour emergency and surface mounted versions available. Plus3 version includes Wieland GST connector.




PRODUCT OVERVIEW

| | |
|-----------------------------|---|
| Product name | Insaver LED II 150 High Output WW DALI E3 |
| Technology | LED |
| Housing | AGC (advanced graphite composite) |
| Mount | Ceiling recessed mounting |
| Environment | Internal |
| General application | Office |
| ETIM Class | EC001744 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 2088 |
| Luminaire efficacy (lm/W) | 95 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Beam Angle (°) | 76 |
| Glare control | < 19 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 22 |
| Electrical protection | Class II |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 99 |
| Housing colour | White |
| IP rating | IP23 |
| IK rating | IK02 |
| Product EAN number | 8711971981268 |

PHOTOMETRY

Insaver LED II 150 Insaver LED II 150 High Output WW DALI E3 3098126

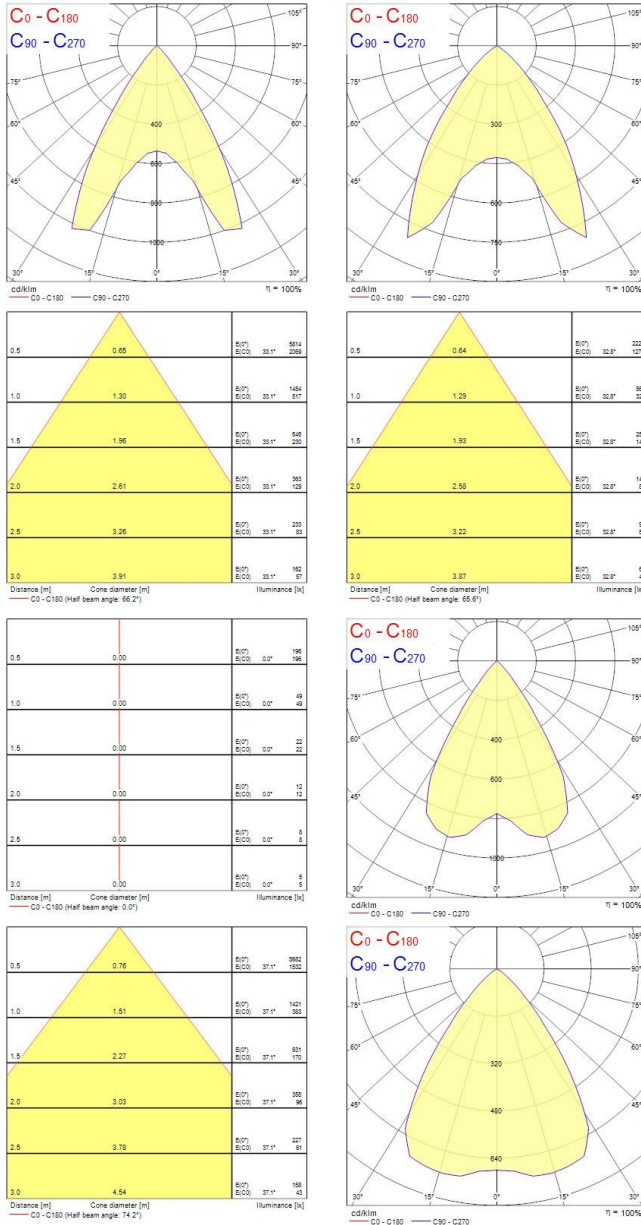

TECHNICAL DRAWINGS

