

SylFast T8

SylFast T8 2x36W EB (Electronic Ballast)

0046104



Product features

- T8 fluorescent batten made from roll-formed steel. With punch out conduit holes on both ends and 3 pole terminal block. White body. For use with T8 lamps (ordered separately). IP20. IK02. 220-240V. Class 1. Electronic ballast (non-dimmable).



PRODUCT OVERVIEW

Product name	SylFast T8 2x36W EB (Electronic Ballast)
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	2 years
Fixture luminous flux (lm)	5696
LOR (%)	89
Light colour	N/A
Total power consumption (W)	72
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288461045

DATA TABLE

General data

Product name	SylFast T8 2x36W EB (Electronic Ballast)
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	-25°C - 55°C

SylFast T8

SylFast T8 2x36W EB (Electronic Ballast)

0046104

ETIM Class	EC000109
Warranty	2 years

Optical data

Fixture luminous flux (lm)	5696
LOR (%)	89
Light colour	N/A
Adjustable chromaticity	N
Distribution type	Symmetric, Direct

Electrical data

Total power consumption (W)	72
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1227
Nominal Product Width (mm)	102
Nominal Product Height (mm)	80
Weight (kg)	1.029

Packaging

Single packaging type	Without Packaging
Product EAN number	5410288461045
Packaging single length / height (cm)	122.8
Packaging single width (cm)	4.0
Packaging single depth (cm)	4.9
DUN14 (outer)	15410288461042
Units per outer package	6
Packaging outer length / height (cm)	124.3
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	16.2


Safety data

Optimal operating condition (°C)	-25-55
----------------------------------	--------

PHOTOMETRY

SylFast T8

SylFast T8 2x36W EB (Electronic Ballast)
0046104

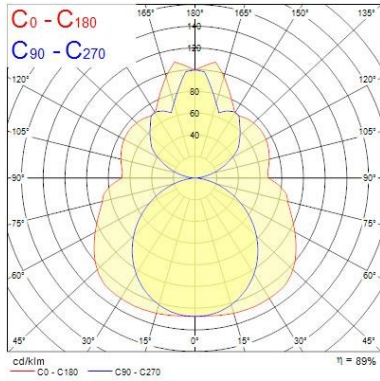

TECHNICAL DRAWINGS

