

Sylproof Superia LED G3 MW


SYLPROOF SUPERIA LED G3 1200mm Single 4K DALI MW

0048699



Product features

- Sylproof Superia, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. Polycarbonate housing, Polycarbonate diffuser, DALI dimmable, with MW sensor, 4000K, CRI80, 3800 lm, 27 W, 140 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.

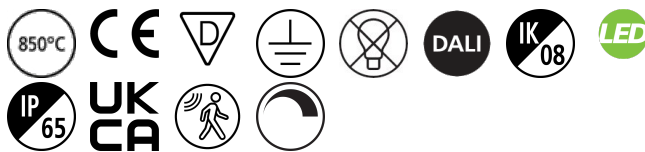

PRODUCT OVERVIEW


Product name	SYLPROOF SUPERIA LED G3 1200mm Single 4K DALI MW
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	3800
Luminaire efficacy (lm/W)	140
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	27
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	1
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288486994

PHOTOMETRY

Sylproof Superia LED G3 MW

SYLPROOF SUPERIA LED G3 1200mm Single 4K DALI MW

0048699

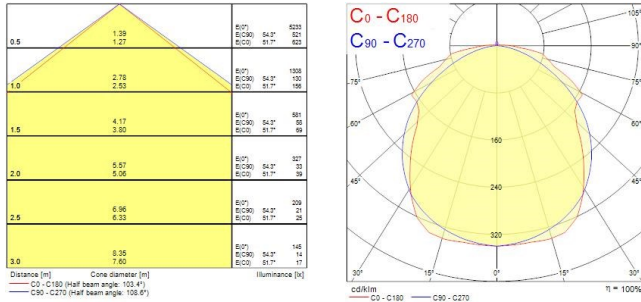

TECHNICAL DRAWINGS

