


Syl-Line electrical unit SYL-LINE GT3R 4K WD WH 0042112

Product features

- Syl-Line LED Gear Tray, 4000K Neutral White, Non Dimming, Wide Beam, White

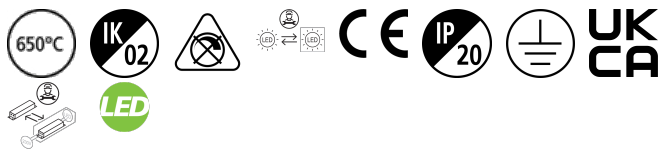

PRODUCT OVERVIEW

Product name	SYL-LINE GT3R 4K WD WH
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Environment	Interior
General application	Logistics & Industry, Retail
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	6342
Luminous flux (lm)	6342
Luminaire efficacy (lm/W)	129.43
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	49
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288421124


PHOTOMETRY

Syl-Line electrical unit SYL-LINE GT3R 4K WD WH 0042112

0.5	0.98	E:0°	1080
	0.98	E:C90	2035
		E:C0	187
1.0	1.96	E:0°	2738
	1.97	E:C90	502
		E:C0	284
1.5	2.94	E:0°	1217
	2.96	E:C90	327
		E:C0	225
2.0	3.92	E:0°	888
	3.94	E:C90	125
		E:C0	151
2.5	4.90	E:0°	438
	4.93	E:C90	90
		E:C0	79
3.0	5.88	E:0°	304
	5.92	E:C90	58
		E:C0	58

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 88.3°)
— C90 - C270 (Half beam angle: 88.3°)

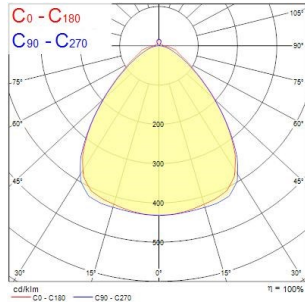

TECHNICAL DRAWINGS

