

## T5 FHE Luxline Plus

21W/T5/827 FHE  
0002799



### Product features



## PRODUCT OVERVIEW

Product name	21W/T5/827 FHE
Technology	Fluorescent
Watt (Rated) (W)	21
Lamp shape	Tube, double-ended
Type	T5 FHE Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944519
E-number SE	8356508
E-number Norway	3843421
Luminous flux (lm)	1900
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	92
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	21.00
Product Voltage (V)	123
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027999

## DATA TABLE

### General data

Product name	21W/T5/827 FHE
Technology	Fluorescent
Watt (Rated) (W)	21
Lamp shape	Tube, double-ended
Type	T5 FHE Luxline Plus

## T5 FHE Luxline Plus

21W/T5/827 FHE

0002799

Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944519
E-number SE	8356508
E-number Norway	3843421

### Optical data

Luminous flux (lm)	1900
Luminous flux (Rated) (lm)	1900
Luminous flux (Nominal) at 35°C (lm)	2100
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	92
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	2700
Light colour	Homelight
Colour Code	827
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

### Electrical data

Wattage (W)	21.00
Watt (Rated) - High frequency (W)	20.70
Current (A)	0.170
Product Voltage (V)	123
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	170
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	23

## T5 FHE Luxline Plus

21W/T5/827 FHE

0002799

### Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

### Physical data

Nominal Product Length (mm)	850.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	849.0
Length base to pin Min-Max (mm) - B	853.7-856.1
Max. Lamp Length (mm) - C/L	863.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.064

### Packaging


Single packaging type	Carton
Product EAN number	5410288027999
Packaging single length / height (cm)	86.2
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027996
Units per outer package	25
Packaging outer length / height (cm)	87.6
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

### Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

## PHOTOMETRY


T5 FHE Luxline Plus  
21W/T5/827 FHE  
0002799

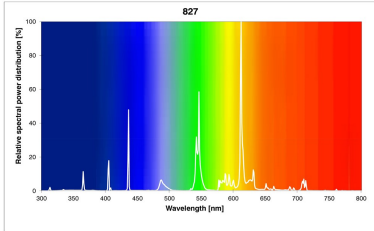

## TECHNICAL DRAWINGS



0002799

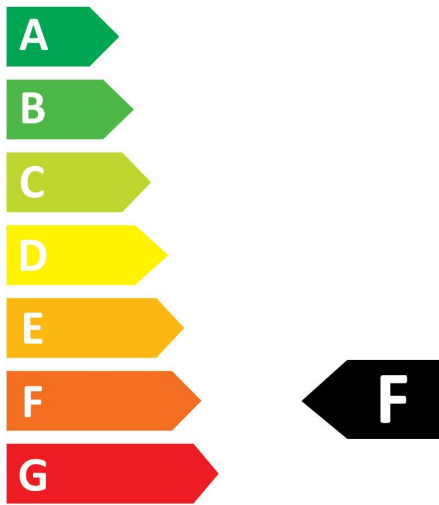

**21**  
kWh/1000h




2019/2015

# SYLVANIA

T5 FHE Luxline Plus  
21W/T5/827 FHE  
0002799



0002799

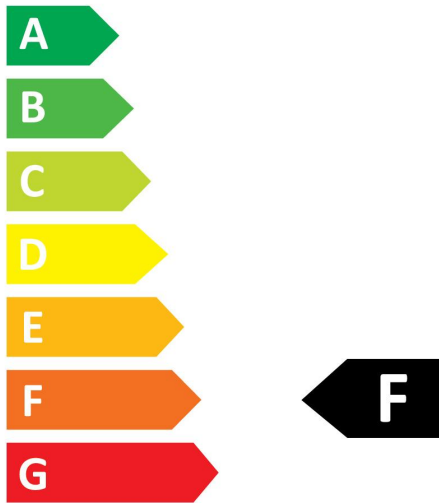

**21**  
kWh/1000h



2019/2015