


Start Tubular - Electronic

Start Tubular IP66 154 EB 840
0042343



Product features

-

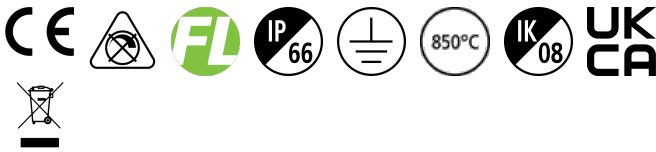

PRODUCT OVERVIEW

Product name	Start Tubular IP66 154 EB 840
Technology	Fluorescent
Cap/Base	G5
Housing	PC Polycarbonate
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
Warranty	2 years
Fixture luminous flux (lm)	3163
Luminaire efficacy (lm/W)	62
LOR (%)	74
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	85
Total power consumption (W)	51
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK08
Product EAN number	5410288423432
Light source included	0002782

PHOTOMETRY


Start Tubular - Electronic

Start Tubular IP66 154 EB 840
0042343

0.5	1.40 4.55	E:0° E:C90 E:C0	3421 335 11
1.0	2.80 9.10	E:0° E:C90 E:C0	889 84 4
1.5	4.21 13.64	E:0° E:C90 E:C0	380 37 2
2.0	5.61 18.19	E:0° E:C90 E:C0	214 21 1
2.5	7.01 22.74	E:0° E:C90 E:C0	137 13 1
3.0	8.41 27.29	E:0° E:C90 E:C0	96 9 0

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 165.0°)
— C90 - C270 (Half beam angle: 108.0°)

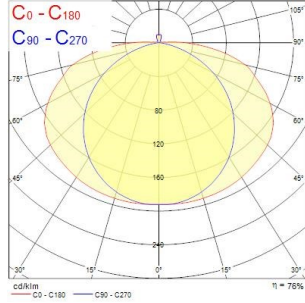

TECHNICAL DRAWINGS

