

START Panel Flat UGR19 625x625


START FLAT PANEL UGR19 625 3000K G2

0047577



Product features

- Edge lit LED flat low glare panel (UGR<19). Low Flicker, 33 W, Warm White, 3000 K, 3300 lumens, 100 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, electronic non dimmable driver. (HxWxD) 10.5 x 595 x 595 mm

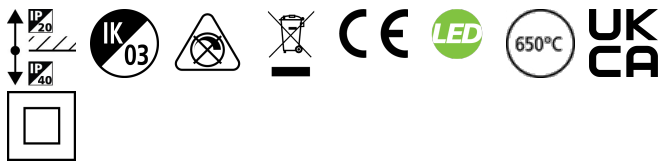

PRODUCT OVERVIEW

Product name	START FLAT PANEL UGR19 625 3000K G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288475776

DATA TABLE

General data

Product name	START FLAT PANEL UGR19 625 3000K G2
Technology	LED

START Panel Flat UGR19 625x625 START FLAT PANEL UGR19 625 3000K G2 0047577

Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3300
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	33
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	No
Drive current (mA)	900
Inrush Current (A)	14
Inrush Duration (µs)	450
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 16A B Breaker	24

Lifetime data

Lifespan L70 B50	50000
------------------	-------

Physical data

Housing colour	White
IP rating	IP40/20
IK rating	IK03
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	10.5

START Panel Flat UGR19 625x625 START FLAT PANEL UGR19 625 3000K G2 0047577

Weight (kg) 3.165


Packaging

Single packaging type	Carton
Product EAN number	5410288475776
Packaging single length / height (cm)	71.13
Packaging single width (cm)	65.23
Packaging single depth (cm)	3.83
DUN14 (outer)	15410288475773
Units per outer package	2
Packaging outer length / height (cm)	73.6
Packaging outer width (cm)	68.0
Packaging outer depth (cm)	9.8

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

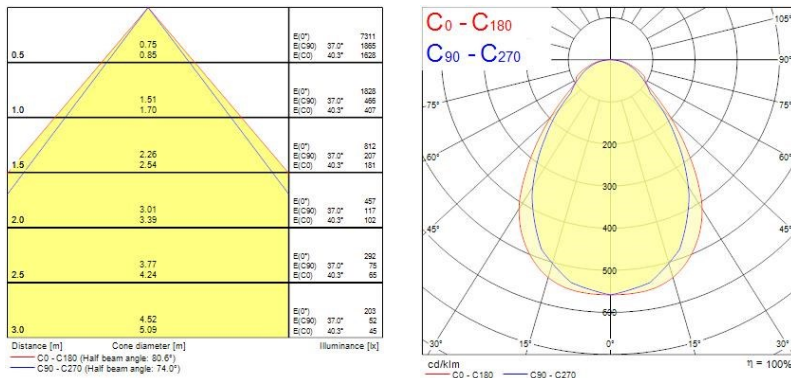

TECHNICAL DRAWINGS

