

## Start Waterproof LED G3 fixed output

*START Waterproof Twin 1500 HO IP65 8300lm 840*  
0048625



### Product features

- Start Waterproof, integrated LED weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, 301 stainless steel diffuser clips and fixing brackets for surface mounting. Polycarbonate housing, Polycarbonate diffuser, 8300 lm, 67 W, 120 lm/W, 4000 K, drive current 1010 mA, Non dimmable, CRI80, IP65, IK08, Class I, nominal average life (h):50000, 1578 mm x 110 mm x 78 mm ,energy class: A++ A+ A, D-mark




### PRODUCT OVERVIEW

Product name	START Waterproof Twin 1500 HO IP65 8300lm 840
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4309044
Warranty	5 years
Fixture luminous flux (lm)	8300
Luminaire efficacy (lm/W)	124
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Glare control	< 26
Photobiological Risk Group	RG1
Total power consumption (W)	67
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Grey
IP rating	IP65
IK rating	IK08
Product EAN number	5410288486253

### PHOTOMETRY

## Start Waterproof LED G3 fixed output *START Waterproof Twin 1500 HO IP65 8300lm 840* 0048625

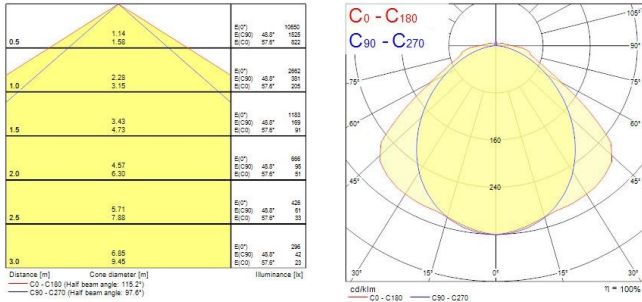

## TECHNICAL DRAWINGS

