


DeltaWing LED - DALI dimmable & Emergency 3 hour DELTAWING LED40 DALI 4K EMPRO 1200 0044901



Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, DALI dimmable, Emergency PRO 3 hour maintained, 4000lm, 39W, L90B10, lifespan: 55,000 hours L90B10

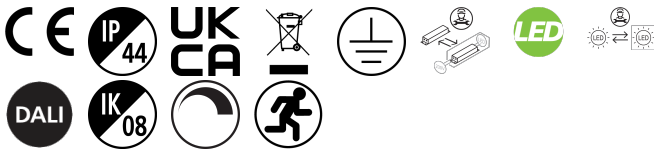

PRODUCT OVERVIEW

| | |
|-----------------------------|--|
| Product name | DELTAWING LED40 DALI 4K EMPRO 1200 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting |
| Environment | Internal |
| General application | Education, Hospitality, Logistics & Industry, Office, Retail |
| ETIM Class | EC002892 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 4000 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Beam Angle (°) | 103 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 39 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 99 |
| Housing colour | White |
| IP rating | IP44 |
| IK rating | IK08 |
| Product EAN number | 5410288449012 |

PHOTOMETRY