


Sylproof Tubular LED - DALI

Sylproof Tubular LED 2X1200 DALI NW
0047602



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

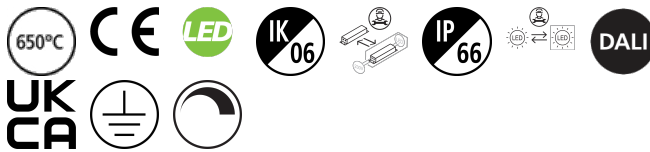

PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1200 DALI NW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	4264
Luminous flux (lm)	4264
Luminaire efficacy (lm/W)	109.33
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476025


PHOTOMETRY

Sylproof Tubular LED - DALI Sylproof Tubular LED 2X1200 DALI NW 0047602

Distance [m]	Cone diameter [m]	E0°	E10°	E30°	E45°	E60°	E75°	E90°
0.5	1.19 2.23	4834	1445	484	271	161	107	71
1.0	2.38 4.45	1209	361	117	65	40	27	19
1.5	3.58 6.68	487	144	48	27	16	11	7
2.0	4.77 8.90	302	90	30	17	10	7	5
2.5	5.96 11.13	192	58	19	11	7	5	3
3.0	7.15 13.35	134	40	13	8	5	3	2

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 135.0°)
— C90 - C270 (Half beam angle: 100.0°)



TECHNICAL DRAWINGS

