

SylFlat LED Non Dimmable - Recessed

SYLFLAT 1400 SQUARE 4000K
0053296



Product features

- Integrated square recessed 225mm x 225mm LED downlight providing uniform distribution with an opal diffuser, 110° beam angle, 1400LM, 14W, 100lm/W, 4000K, CRI80, non-dimmable, IP20, IK03, 30,000hrs (L70)



PRODUCT OVERVIEW

Product name	SYLFLAT 1400 SQUARE 4000K
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Environment	Internal
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4274335
E-number SE	7470817
Warranty	3 years
Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	14
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integrated
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288532967

SylFlat LED Non Dimmable - Recessed SYLFLAT 1400 SQUARE 4000K 0053296

DATA TABLE

General data

Product name	SYLFLAT 1400 SQUARE 4000K
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Environment	Internal
General application	Residential & Consumer
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4274335
E-number SE	7470817
Warranty	3 years

Optical data

Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	100
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	14
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integrated
Dimmable	No
Drive current (mA)	185
Inrush Current (A)	4.5
Inrush Duration (µs)	52
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	11
Max. Luminaires per 16A C Breaker	18

Lifetime data

Lifespan L70 B50	30000
------------------	-------

SylFlat LED Non Dimmable - Recessed SYLFLAT 1400 SQUARE 4000K 0053296

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	225
Nominal Product Width (mm)	225
Nominal Product Height (mm)	27
Nominal Product Diameter (mm)	225
Weight (kg)	0.387
Recessed Depth (mm)	27


Packaging

Single packaging type	Carton
Product EAN number	5410288532967
Packaging single length / height (cm)	30.0
Packaging single width (cm)	6.6
Packaging single depth (cm)	25.5
DUN14 (outer)	15410288532964
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	31.5
Packaging outer depth (cm)	37.5

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

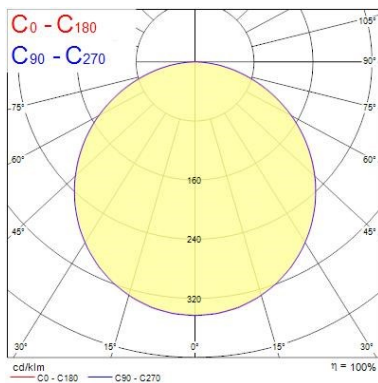

Distance [m]	Cone diameter [m]	E [0°]	E [C90]	E [C0]
0.5	1.53 1.92	2103	56.9° 171	56.7° 174
1.0	3.07 3.04	526	56.9° 42	56.7° 44
1.5	4.60 4.97	234	56.9° 19	56.7° 18
2.0	6.14 6.09	131	56.9° 11	56.7° 11
2.5	7.67 7.61	84	56.9° 7	56.7° 7
3.0	9.20 9.13	58	56.9° 5	56.7° 5

Distance [m] Cone diameter [m] Illuminance [lx]
 C0 - C180 (Half beam angle: 113.4°)
 C90 - C270 (Half beam angle: 113.8°)

TECHNICAL DRAWINGS

SylFlat LED Non Dimmable - Recessed *SYLFLAT 1400 SQUARE 4000K* 0053296

