

START Panel Flat UGR19 600x600


START FLAT PANEL UGR19 600 4000K DALI G2

0047637



Product features

- Edge lit LED flat low glare panel (UGR<19). Low Flicker, 33 W, Neutral White, 4000 K, 3400 lumens, 100 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, TRIDONIC DALI driver (push dim). (HxWxD) 10.5 x 595 x 595 mm

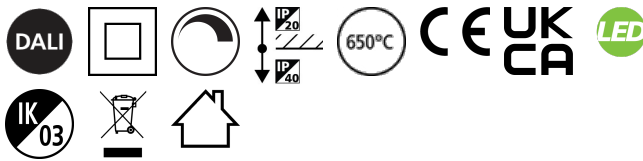

PRODUCT OVERVIEW

Product name	START FLAT PANEL UGR19 600 4000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
ETIM Class	EC002892
E-number FI	4274163
Warranty	5 years
Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0
Total power consumption (W)	33
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288476377

DATA TABLE

General data

Product name	START FLAT PANEL UGR19 600 4000K DALI G2
--------------	--

START Panel Flat UGR19 600x600

START FLAT PANEL UGR19 600 4000K DALI G2
0047637

Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Interior
General application	Education, Office
Operating temperature range (°C)	-10°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC002892
E-number FI	4274163
Warranty	5 years

Optical data

Fixture luminous flux (lm)	3400
Luminaire efficacy (lm/W)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	90
Glare control	< 19
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	33
Mains voltage (V)	220-240V~
Lamp power factor	0.98
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
Drive current (mA)	900
Inrush Current (A)	23.3
Inrush Duration (µs)	192
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	25
Max. Luminaires per 10A B Breaker	15
Max. Luminaires per 16A B Breaker	24

Lifetime data

Lifespan L70 B50	50000
------------------	-------

Physical data

Housing colour	White
IP rating	IP40/20
IK rating	IK03
Diffuser finish	Prismatic
Diffuser material	PMMA Acrylic

START Panel Flat UGR19 600x600

START FLAT PANEL UGR19 600 4000K DALI G2

0047637

Nominal Product Length (mm)	595
Nominal Product Width (mm)	595
Nominal Product Height (mm)	10.5
Weight (kg)	2.99


Packaging

Single packaging type	Carton
Product EAN number	5410288476377
Packaging single length / height (cm)	68.8
Packaging single width (cm)	62.5
Packaging single depth (cm)	3.3
DUN14 (outer)	15410288476374
Units per outer package	2
Packaging outer length / height (cm)	71.1
Packaging outer width (cm)	65.7
Packaging outer depth (cm)	10.0

Safety data

Optimal operating condition (°C)	-10-40
----------------------------------	--------

PHOTOMETRY

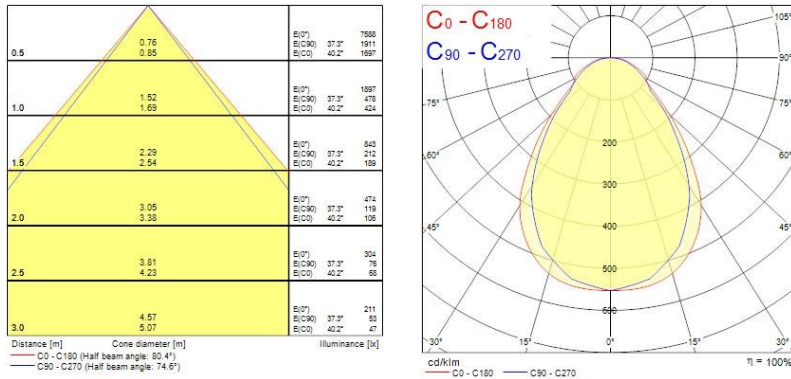

TECHNICAL DRAWINGS

