

Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER

2050682



Product features

- High-end architectural (3000K) warm white LED pendant with non dimmable driver and surface mounted housing, finished in a silver finish (RAL9006)



PRODUCT OVERVIEW

Product name	MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER
Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
ETIM Class	EC001743
E-number FI	4275460
E-number SE	7561410
E-number Norway	3290200
Warranty	5 years
Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Beam Angle (°)	30
Total power consumption (W)	10
Electrical protection	Class II
Control gear mounting	Integral
Dimmable	No
Housing colour	Silver
IP rating	IP20
IK rating	IK02
Product EAN number	5025768506828

DATA TABLE

General data

Product name	MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER
--------------	--

Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER
2050682

Technology	LED
Mount	Ceiling surface mounting
Environment	Indoor
General application	Hospitality, Office, Retail, Residential & Consumer
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001743
E-number FI	4275460
E-number SE	7561410
E-number Norway	3290200
Warranty	5 years

Optical data

Fixture luminous flux (lm)	1114
Luminaire efficacy (lm/W)	111.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Adjustable chromaticity	N
Beam Angle (°)	30
Distribution type	Symmetric

Electrical data

Total power consumption (W)	10
Mains voltage (V)	220-240V~
Electrical protection	Class II
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Drive current (mA)	250
Energy Efficiency Class (A->G) of contained light source	D
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	50000
------------------	-------

Physical data

Housing colour	Silver
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	75
Nominal Product Width (mm)	75
Nominal Product Height (mm)	129
Nominal Product Diameter (mm)	75
Max. Lamp Diameter (mm) - D	75
Weight (kg)	0.95



Myriad Pendant Silver - Surface Mounted

MYRIAD PENDANT 3000K SURFACE MTD SWITCHED SILVER
2050682

Packaging

Single packaging type	Carton
Product EAN number	5025768506828
Packaging single length / height (cm)	17.5
Packaging single width (cm)	15.0
Packaging single depth (cm)	17.5
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	15.0
Packaging outer depth (cm)	17.5

PHOTOMETRY

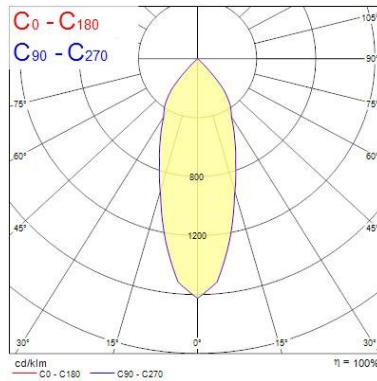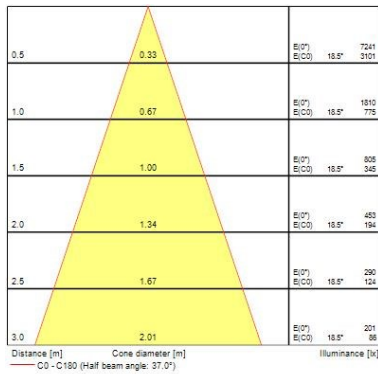

TECHNICAL DRAWINGS

