


## Beacon Muse Xicato®

BEACON MUSE Xicato® 3K O/B DIM LS3 White  
2059797



### Product features

- Integrated LED spotlight with Xicato® Artist LED Module, white RAL 9016, unique soft-touch ring, adjustable beam angle from a 8° spot to a 52° flood, compact and minimalist design, ideal for museum, gallery and high-end retail applications, die-cast aluminium body, passive cooling heatsink, beam angle: 8° spot to 52° flood, optics: aspheric glass lens, colour temperature: 3000K warm white, total system power: 20W, total fixture output: 338/598lm, luminaire efficacy: 30lm/W, LOR: 100%, colour rendering: Ra 98 typical, LED Chromacity: 3 step MacAdam ellipse, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 700mA, electronic driver, dimmable via on-board potentiometer, power factor: 0.9 electrical protection: CLASS II, 3-circuit track adaptor, suitable for Concord Lytespan 3 track, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 355°, vertical tilt: 90°, dimensions: Ø80x135x176mm, weight: 0.95kg

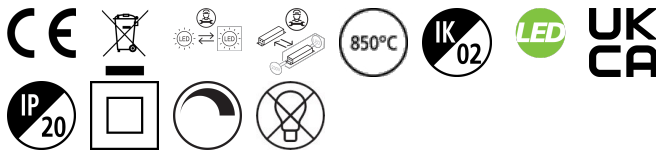

### PRODUCT OVERVIEW

Product name	BEACON MUSE Xicato® 3K O/B DIM LS3 White
Technology	LED
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
ETIM Class	EC001744
Warranty	5 years
Fixture luminous flux (lm)	338/598
Luminaire efficacy (lm/W)	30
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM2
Photobiological Risk Group	RG1
Total power consumption (W)	20
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
Dimmable	Yes
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Product EAN number	5025768597970

### DATA TABLE

#### General data

Product name	BEACON MUSE Xicato® 3K O/B DIM LS3 White
Technology	LED

## Beacon Muse Xicato®

*BEACON MUSE Xicato® 3K O/B DIM LS3 White*  
2059797

Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	338/598
Luminaire efficacy (lm/W)	30
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	98
Colour Variation Initial (SDCM)	SDCM2
Photobiological Risk Group	RG1

### Electrical data

Total power consumption (W)	20
Mains voltage (V)	220-240V~
Lamp power factor	0.95
Electrical protection	Class II
Control gear type	Other
Control gear mounting	Integral
Dimmable	Yes
Drive current (mA)	700
Inrush Current (A)	5
Inrush Duration (µs)	50
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	52
Max. Luminaires per 16A C Breaker	85
Max. Luminaires per 20A C Breaker	54
Max. Luminaires per 10A B Breaker	32
Max. Luminaires per 16A B Breaker	50
Max. Luminaires per 20A B Breaker	63

### Lifetime data

Lifespan L70 B50	90000
------------------	-------

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK02
Diffuser finish	Frosted
Diffuser material	PC Polycarbonate
Nominal Product Width (mm)	85
Nominal Product Height (mm)	176
Nominal Product Diameter (mm)	80

## Beacon Muse Xicato®

BEACON MUSE Xicato® 3K O/B DIM LS3 White  
2059797

Weight (kg)	1.1
-------------	-----





### Packaging

Single packaging type	Carton
Product EAN number	5025768597970
Packaging single length / height (cm)	17.5
Packaging single width (cm)	17.5
Packaging single depth (cm)	15.0
DUN14 (outer)	05025768597970
Units per outer package	1
Packaging outer length / height (cm)	17.5
Packaging outer width (cm)	17.5
Packaging outer depth (cm)	15.0

### Safety data

Dry applications use only	Yes
---------------------------	-----

## PHOTOMETRY

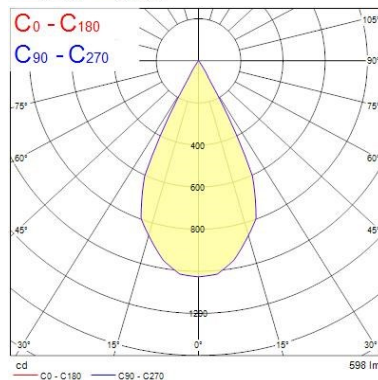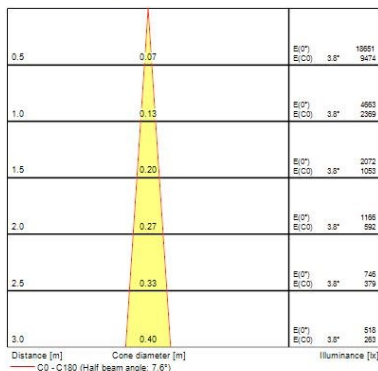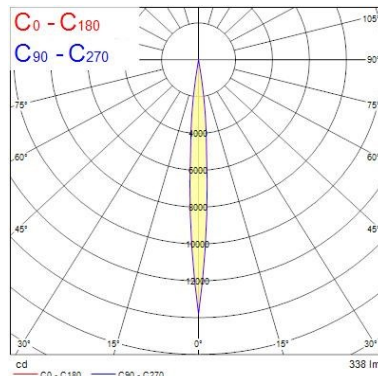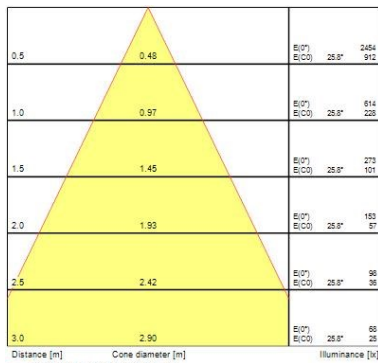

## TECHNICAL DRAWINGS

## Beacon Muse Xicato®

*BEACON MUSE Xicato® 3K O/B DIM LS3 White*  
2059797

