


START DOWNLIGHT IP44 175

START Downlight 175 IP44 1425lm 830
0030326



Product features

- Ceiling recessed LED downlight IP44 (from the front), perfect where limited ceiling void is available with only 55mm product depth and 175mm cutout. Ideal replacement for 1x32W/2x18W CFL downlights. The polycarbonate diffuser allows for a wider light distribution and increased spacings between luminaires. Loop in loop out connector allows for quick installation. Die-cast aluminium body, 1425LM, 15W, 95lm/W, 3000K, Driver Current: 390mA, CRI80, 74° beam angle, Non-dimmable LED driver, IP44 from the front, IK07, (HxW) 55x195mm, Class 2, 220-240V

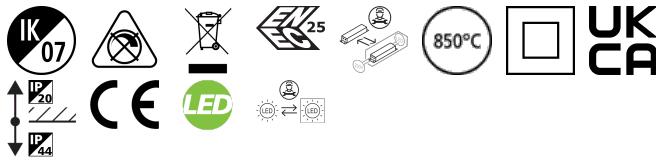


PRODUCT OVERVIEW

Product name	START Downlight 175 IP44 1425lm 830
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
General application	Hospitality, Logistics & Industry, Office
ETIM Class	EC001744
E-number FI	4278147
Warranty	5 years
Fixture luminous flux (lm)	1425
Luminaire efficacy (lm/W)	95
LOR (%)	100
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	74
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	LED driver constant current
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9003 - Signal white
IP rating	IP44/20
IK rating	IK07
Product EAN number	5410288303260

PHOTOMETRY

START DOWNLIGHT IP44 175

START Downlight 175 IP44 1425lm 830
0030326



Distance [m]	Cone diameter [m]	E(0°) [lx]	E(C0) [lx]	E(C90) [lx]
0.5	0.81	3141	39.1*	782
1.0	1.63	785	39.1*	154
1.5	2.44	348	39.1*	82
2.0	3.25	196	39.1*	46
2.5	4.06	125	39.1*	29
3.0	4.88	83	39.1*	20

Distance [m] Cone diameter [m]
E(0°) E(C0) E(C90) Illuminance [lx]
C0 - C180 (Half beam angle: 78.2°)

TECHNICAL DRAWINGS

