


DeltaWing LED - Electronic

DELTAWING LED69 EB 3K 1200
0044874



Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 3000K Warm White, Electronic, 6984lm, 71W, lifespan: 55,000 hours L90B10, A++ A+ A

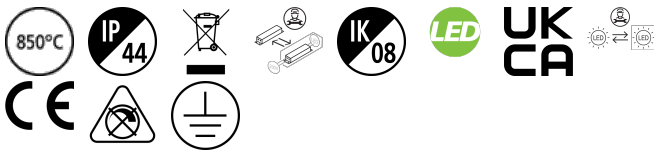

PRODUCT OVERVIEW

| | |
|-----------------------------|--|
| Product name | DELTAWING LED69 EB 3K 1200 |
| Technology | LED |
| Cap/Base | N/A |
| Housing | Steel |
| Mount | Ceiling surface mounting, Suspended |
| Environment | Internal |
| General application | Education, Hospitality, Logistics & Industry, Office, Retail |
| ETIM Class | EC002892 |
| E-number SE | 7014009 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 6984 |
| Luminaire efficacy (lm/W) | 98.36 |
| LOR (%) | 100 |
| Colour temperature (K) | 3000 |
| Light colour | Warm White |
| CRI (Ra) | 80 |
| Colour Consistency (SDCM) | 3 |
| Beam Angle (°) | 102 |
| Glare control | < 24 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 71 |
| Product Voltage (V) | 240 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | No |
| Housing colour | White |
| IP rating | IP44 |
| IK rating | IK08 |
| Product EAN number | 5410288448749 |

PHOTOMETRY


DeltaWing LED - Electronic

DELTA WING LED69 EB 3K 1200
0044874

| | | | |
|-----|--------------|-------------------------|------------------|
| 0.5 | 1.24 1.64 | E:0° E:C90° E:C0° | 790 96 99 |
| 1.0 | 2.48 3.28 | E:0° E:C90° E:C0° | 190° 54 12 |
| 1.5 | 3.72 4.91 | E:0° E:C90° E:C0° | 388 117 95 |
| 2.0 | 4.96 6.55 | E:0° E:C90° E:C0° | 489 152 38 |
| 2.5 | 6.20 8.19 | E:0° E:C90° E:C0° | 301 95 21 |
| 3.0 | 7.44 9.83 | E:0° E:C90° E:C0° | 222 78 18 |

Distance [m] Core diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 113.2°)
— C90 - C270 (Half beam angle: 102.2°)



TECHNICAL DRAWINGS

