

## Start Track Spot Integral

START Track Spot Integral 5000lm 940 MB WB WHT  
0005432



### Product features

- Integrated LED spotlight, Textured White - RAL9016, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lens 64° beam angle included, color temperature: 4000k, total system power: 54W, total fixture output: 5000 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1400mA, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Global Track 3 Circuit GA69 adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø91x148x303, weight: 1,265kg.




### PRODUCT OVERVIEW

Product name	START Track Spot Integral 5000lm 940 MB WB WHT
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276975
Warranty	5 years
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	93
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	54
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288054322

### PHOTOMETRY

## Start Track Spot Integral

*START Track Spot Integral 5000lm 940 MB WB WHT*  
0005432

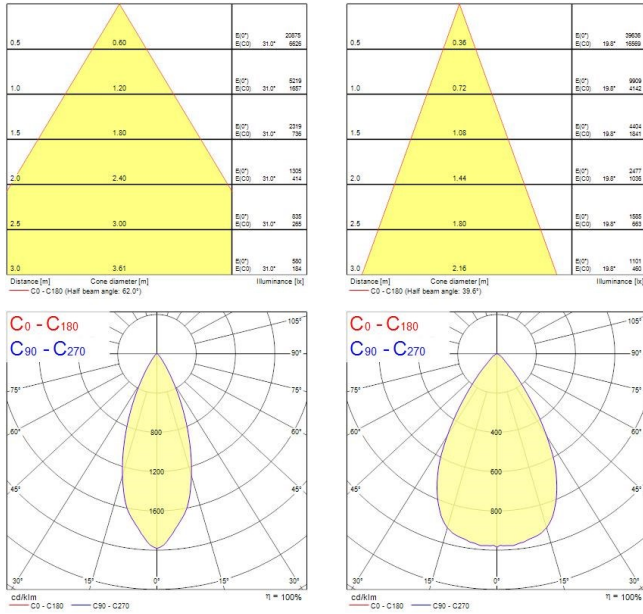

## TECHNICAL DRAWINGS

