

Syl-Line electrical unit


SYL-LINE GT3R 4K DALI DASY SI EMPRO

0042178



Product features

- Syl-Line LED Gear Tray, 4000K Neutral White, Double Asymmetric Beam, Silver, Emergency DALI Inverter Feedback

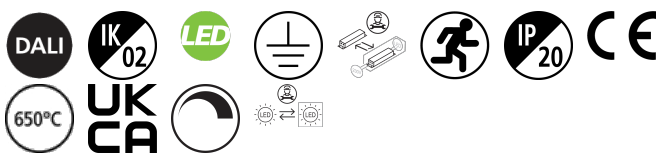

PRODUCT OVERVIEW

Product name	SYL-LINE GT3R 4K DALI DASY SI EMPRO
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Environment	Interior
General application	Logistics & Industry, Retail
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	6535
Luminous flux (lm)	6535
Luminaire efficacy (lm/W)	120
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Photobiological Risk Group	RG0
Total power consumption (W)	54
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	99
Housing colour	Silver
IP rating	IP20
IK rating	IK02
Product EAN number	5410288421780

DATA TABLE

General data

Product name	SYL-LINE GT3R 4K DALI DASY SI EMPRO
Technology	LED

Syl-Line electrical unit

SYL-LINE GT3R 4K DALI DASY SI EMPRO
0042178

Cap/Base	N/A
Housing	Aluminium
Mount	Ceiling surface mounting, Suspended
Environment	Interior
General application	Logistics & Industry, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
Warranty	5 years

Optical data

Fixture luminous flux (lm)	6535
Luminous flux (lm)	6535
Luminaire efficacy (lm/W)	120
Ambient temperature for maximum luminous flux (°C)	25
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Adjustable chromaticity	N
Distribution type	Asymmetric, Double emission
Photobiological Risk Group	RG0
Emergency duration (h)	3.0

Electrical data

Total power consumption (W)	54
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Dimmable	Yes
Minimum dimming level (%)	99
Drive current (mA)	250
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	60000
Lifespan L70 B10	60000
Lifespan L80 B50	60000
Lifespan L80 B10	60000

Physical data

Housing colour	Silver
IP rating	IP20
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	1720


Syl-Line electrical unit SYL-LINE GT3R 4K DALI DASY SI EMPRO 0042178

Nominal Product Width (mm)	70
Nominal Product Height (mm)	82
Weight (kg)	2.54

Packaging

Single packaging type	Carton
Product EAN number	5410288421780
Packaging single length / height (cm)	171.0
Packaging single width (cm)	8.0
Packaging single depth (cm)	4.0
DUN14 (outer)	15410288421787
Units per outer package	1
Packaging outer length / height (cm)	171.0
Packaging outer width (cm)	8.0
Packaging outer depth (cm)	4.0

PHOTOMETRY

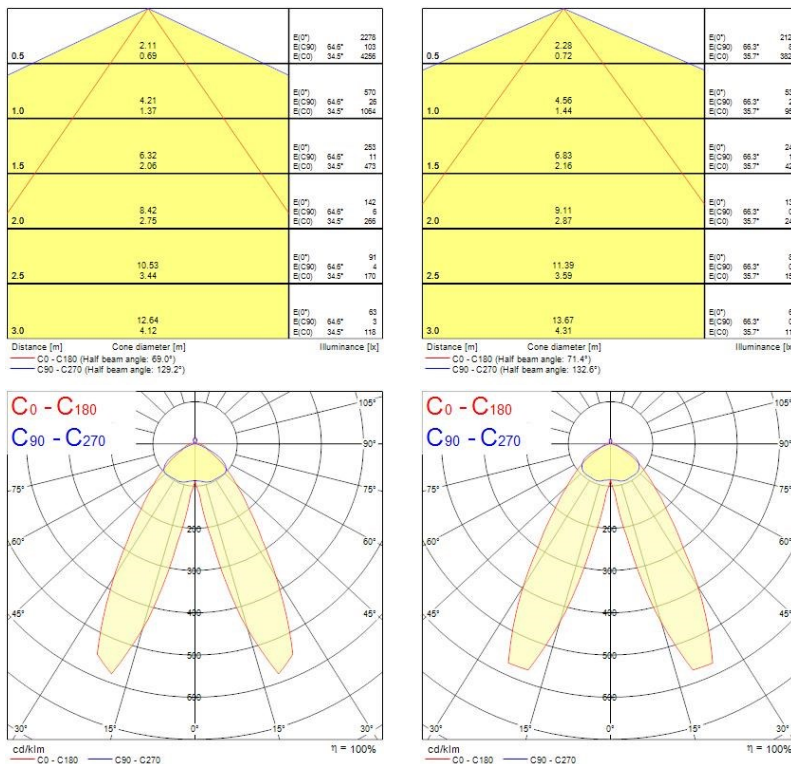

TECHNICAL DRAWINGS

