


## SylFast T8

*SylFast T8 1x58W EB E3*  
0046112



### Product features

- T8 fluorescent batten made from roll-formed steel. With punch out conduit holes on both ends and 3 pole terminal block. White body. For use with T8 lamps (ordered separately). IP20. IK02. 220-240V. Class 1. Electronic ballast (non-dimmable). Integral 3 hour maintained emergency version.

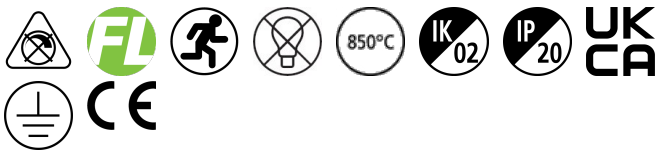

## PRODUCT OVERVIEW

Product name	SylFast T8 1x58W EB E3
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	2 years
Fixture luminous flux (lm)	4700
LOR (%)	94
Light colour	N/A
Total power consumption (W)	55
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288461120

## DATA TABLE

### General data

Product name	SylFast T8 1x58W EB E3
Technology	Fluorescent
Cap/Base	G13
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	-25°C - 55°C

## SylFast T8

SylFast T8 1x58W EB E3

0046112

ETIM Class	EC000109
Warranty	2 years

### Optical data

Fixture luminous flux (lm)	4700
LOR (%)	94
Light colour	N/A
Adjustable chromaticity	N
Distribution type	Symmetric, Direct
Emergency duration (h)	3.0

### Electrical data

Total power consumption (W)	55
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50/60Hz

### Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1527
Nominal Product Width (mm)	51
Nominal Product Height (mm)	74
Weight (kg)	3.975

### Packaging


Single packaging type	Plastic
Product EAN number	5410288461120
Packaging single length / height (cm)	154.5
Packaging single width (cm)	5.2
Packaging single depth (cm)	5.3
DUN14 (outer)	15410288461127
Units per outer package	6
Packaging outer length / height (cm)	155.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	16.0

### Safety data

Optimal operating condition (°C)	-25-55
----------------------------------	--------

## PHOTOMETRY

SylFast T8  
*SylFast T8 1x58W EB E3*  
 0046112

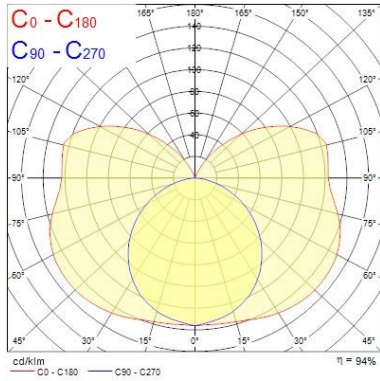

## TECHNICAL DRAWINGS

