

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 600mm Single 4K QC DALI
0048736



Product features

- Sylproof Superia, integrated LED weatherproof luminaire with quick connector, UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, Polycarbonate diffuser, DALI dimmable, 4000K, CRI80, 1850 lm, 14 W, 130 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK08, IP65.




PRODUCT OVERVIEW

| | |
|---------------------------------|-------------------------------------------------|
| Product name | SYLPROOF SUPERIA LED G3 600mm Single 4K QC DALI |
| Technology | LED |
| Housing | Polyester |
| Mount | Ceiling surface mounting |
| General application | Logistics & Industry |
| ETIM Class | EC000109 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 1850 |
| Luminaire efficacy (lm/W) | 130 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM3 |
| Beam Angle (°) | 100 |
| Photobiological Risk Group | RG0 |
| Total power consumption (W) | 14 |
| Electrical protection | Class I |
| Control gear type | Electronic ballast |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Housing colour | Grey |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288487366 |

PHOTOMETRY

Sylproof Superia LED G3 DALI

SYLPROOF SUPERIA LED G3 600mm Single 4K QC DALI
0048736

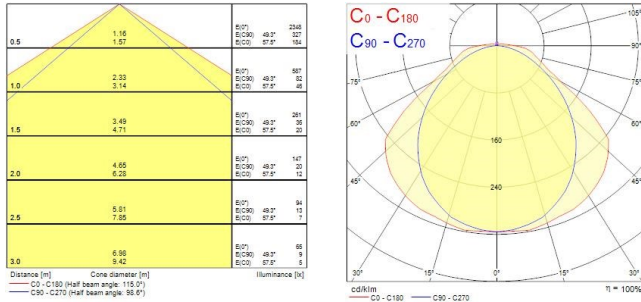

TECHNICAL DRAWINGS

