

T5 FHO Luxline Plus

24W/T5/865 FHO
0002774



Product features

- T5 FHO Luxline Plus



PRODUCT OVERVIEW

Product name	24W/T5/865 FHO
Technology	Fluorescent
Watt (Rated) (W)	24
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944505
E-number SE	8356538
E-number Norway	3800986
Luminous flux (lm)	1600
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	68
Colour temperature (K)	6500
Light colour	Daylight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	24.00
Product Voltage (V)	75
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027746

DATA TABLE

General data

Product name	24W/T5/865 FHO
Technology	Fluorescent
Watt (Rated) (W)	24
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus

T5 FHO Luxline Plus

24W/T5/865 FHO
0002774

Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944505
E-number SE	8356538
E-number Norway	3800986

Optical data

Luminous flux (lm)	1600
Luminous flux (Rated) (lm)	1600
Luminous flux (Nominal) at 35°C (lm)	1800
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	68
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	6500
Light colour	Daylight
Colour Code	865
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Wattage (W)	24.00
Watt (Rated) - High frequency (W)	23.50
Current (A)	0.300
Product Voltage (V)	75
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	300
Lamp Energy Label (class)	G
kWh per 1000 hours burning time	26

T5 FHO Luxline Plus

24W/T5/865 FHO

0002774

Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	550.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	549.0
Length base to pin Min-Max (mm) - B	553.7-556.1
Max. Lamp Length (mm) - C/L	563.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.043

Packaging


Single packaging type	Carton
Product EAN number	5410288027746
Packaging single length / height (cm)	56.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027743
Units per outer package	25
Packaging outer length / height (cm)	57.8
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY


T5 FHO Luxline Plus
24W/T5/865 FHO
0002774

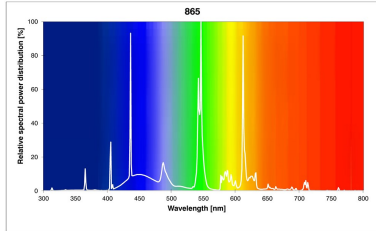

TECHNICAL DRAWINGS



0002774

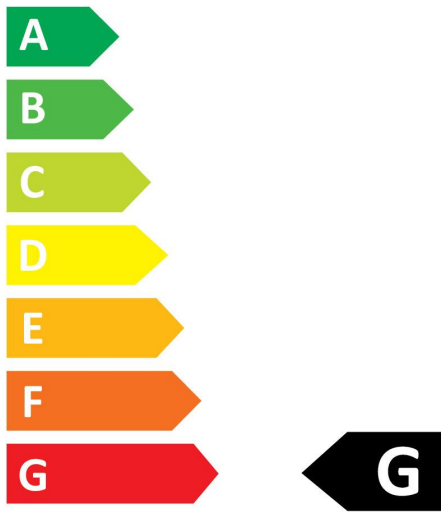

24
kWh/1000h




2019/2015

SYLVANIA

T5 FHO Luxline Plus
24W/T5/865 FHO
0002774



0002774

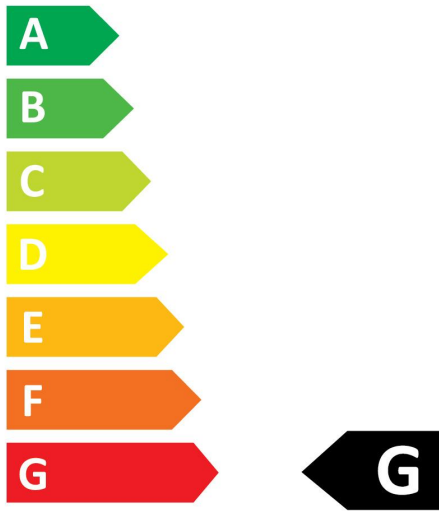

24
kWh/1000h



2019/2015