

## Hydroproof LED G3 Emergency

### HYDROPROOF LED G3 1200mm Twin 4K E3

0048784



#### Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. L 1278 mm x W 110 mm x H 78 mm size, GRP housing, PMMA diffuser, Non dimmable, 3 hour emergency, 4000K, CRI80, 5550 lm, 38 W, 145 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.




#### PRODUCT OVERVIEW

Product name	HYDROPROOF LED G3 1200mm Twin 4K E3
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	5550
Luminaire efficacy (lm/W)	145
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Beam Angle (°)	100
Photobiological Risk Group	RG1
Luminous flux (emergency) (lm)	270
Total power consumption (W)	38
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	No
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487847
Luminous flux (emergency) (lm)	270

#### PHOTOMETRY

Hydroproof LED G3 Emergency  
HYDROPROOF LED G3 1200mm Twin 4K E3  
0048784

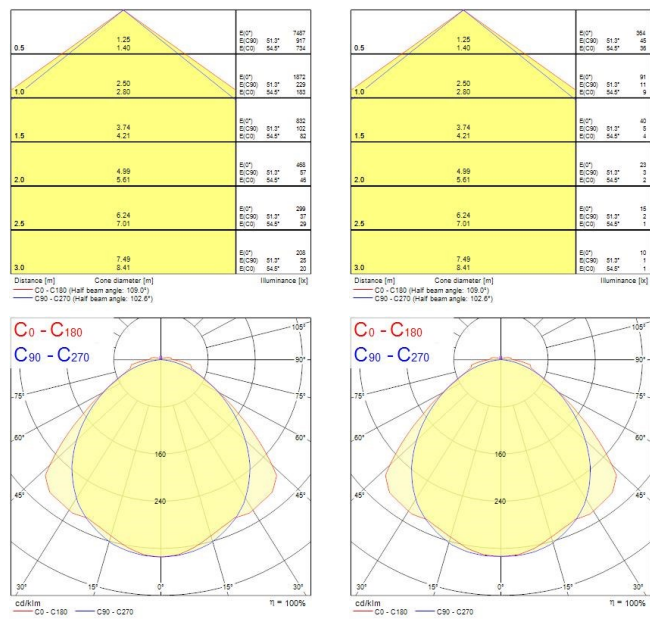

TECHNICAL DRAWINGS

