

SylBatten LED - PIR


SYLBATTEN LED 1505MM 8000LM 4000K EB (TP3) PIR

0045219



Product features

- LED batten, T8 replacement, ease of installation through 2 part push-in design of the housing (safety cable included), through wiring capability (TP3 = 3 core), sheet steel, 8348LM, 79W, 106lm/W, 4000K, drive current: 450mA, CRI 80, 138° wide beam angle, electronic driver (non dimmable), with integrated PIR sensor, IP20, IK07, 50,000 hrs (L70), (LxWxH) 1505x66x76mm, 5 step MacAdam ellipse, 3.7kg, white RAL9016, Class 1, 220-240V, energy class: A++, A+, A.

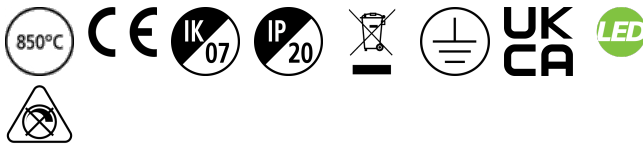


PRODUCT OVERVIEW

Product name	SYLBATTEN LED 1505MM 8000LM 4000K EB (TP3) PIR
Technology	LED
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4274285
E-number SE	7213430
Warranty	5 years
Fixture luminous flux (lm)	8348
Luminaire efficacy (lm/W)	105.67
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM5
Colour Consistency (SDCM)	5
Beam Angle (°)	138
Glare control	< 32
Photobiological Risk Group	RG0
Total power consumption (W)	79
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Built-in
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK07
Product EAN number	5410288452197

SylBatten LED - PIR
SYLBATTEN LED 1505MM 8000LM 4000K EB (TP3) PIR
0045219

PHOTOMETRY

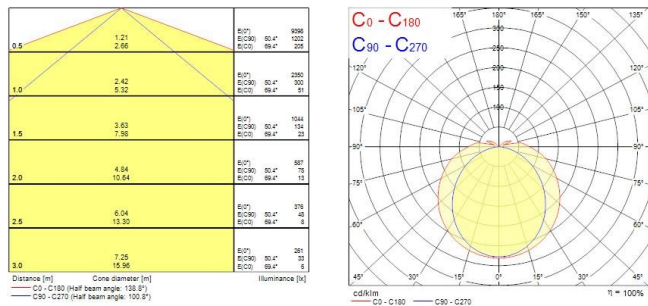

TECHNICAL DRAWINGS

