




## Gentle light, modern design

### START Spot Aluminium

The START Spot Aluminium range combines high lumen efficacy with modern design and comfortable light. The range comes in both IP44 adjustable and IP65 fixed versions with 2700K, 3000K or 4000K light colour temperature options. White and black colour reflectors included in the packaging for IP44 version.

The START Spot Aluminium range has an integrated LED dimmable driver, polycarbonate and aluminium body, loop-in loop-out wiring and a low profile of 64mm making it ideal to fit into low ceiling voids.

# START Spot Aluminium IP44

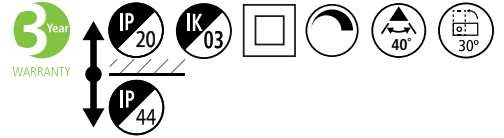


## Features

- Integrated IP44 LED accent downlight with modern design and comfortable light
- Cut-out of 68-72mm, low profile of 64mm and loop-in/loop-out wiring
- White, black or brushed aluminium bezel, adjustable +/- 30°
- White and black colour reflectors included in the packaging
- Dimmable as standard, leading edge/trailing edge phase dimming
- Light output up to 800lm (4000K), efficacy up to 89lm/W
- Choice of 2700K (Homelight), 3000K (Warm white), 4000K (Neutral white)
- Lifespan: 47,000 hours at L70B50

## Product information


Code	Description	Finish	Fixture Power (W)	Fixture lumen (lm)	Luminaire efficacy lm/W	Colour Temperature (K)	CRI	Dimmable	Control Technology
<b>START Spot Aluminium IP44</b>									
0005183	Start Spot Alu 740lm 827 IP44 WHT	White	9	740	82	2700	80	Phase dim	Switched
0005170	Start Spot Alu 740lm 830 IP44 WHT	White	9	740	82	3000	80	Phase dim	Switched
0005171	Start Spot Alu 800lm 840 IP44 WHT	White	9	800	89	4000	80	Phase dim	Switched
0005172	Start Spot Alu 740lm 830 IP44 BRA	Brushed Aluminium	9	740	82	3000	80	Phase dim	Switched
0005173	Start Spot Alu 800lm 840 IP44 BRA	Brushed Aluminium	9	800	89	4000	80	Phase dim	Switched
0005180	Start Spot Alu 720lm 827 IP44 BLK	Black	9	720	80	2700	80	Phase dim	Switched
0005181	Start Spot Alu 720lm 830 IP44 BLK	Black	9	720	80	3000	80	Phase dim	Switched
0005182	Start Spot Alu 760lm 840 IP44 BLK	Black	9	760	84	4000	80	Phase dim	Switched

## Additional Images

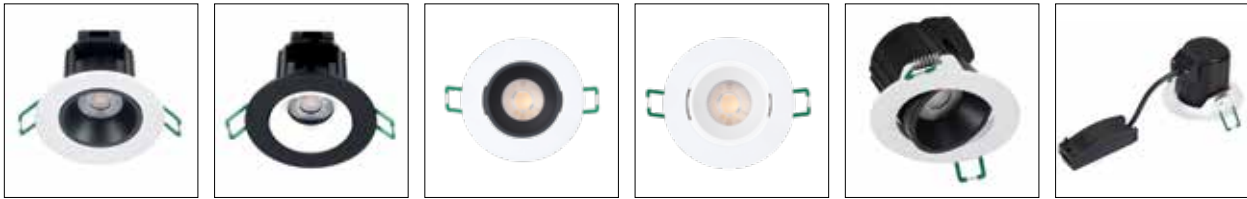


## Photometric Data


IP44 White

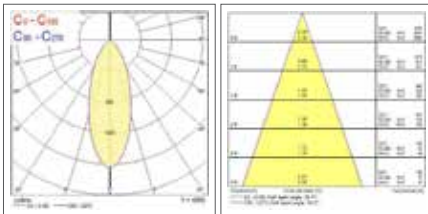


IP44 Black

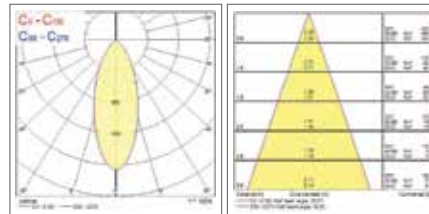

## Dimensions (mm)



# START Spot Aluminium IP65

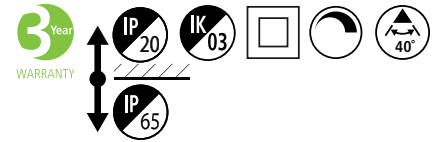


## Features

- Integrated IP65 LED accent downlight modern design and comfortable light
- Low profile of 64mm and loop-in/loop-out wiring
- Cut-out of 68-72mm allows direct replacement of most halogen spots installation on the market
- Fixed, white or brushed aluminium bezels
- Dimmable as standard, leading edge/trailing edge phase dimming
- Light output up to 800lm (4000K), efficacy up to 89lm/W
- Choice of 3000K (Warm white), 4000K (Neutral white)
- Lifespan: 47,000 hours at L70B50

## Product information


Code	Description	Finish	Fixture Power (W)	Fixture lumen (lm)	Luminaire efficacy lm/W	Colour Temperature (K)	CRI	Dimmable	Control Technology
<b>START Spot Aluminium IP65</b>									
0005174	Start Spot Alu 740lm 830 IP65 WHT	White	9	740	82	3000	80	Phase dim	Switched
0005175	Start Spot Alu 800lm 840 IP65 WHT	White	9	800	89	4000	80	Phase dim	Switched
0005176	Start Spot Alu 660lm 830 IP65 BRA	Brushed Aluminium	9	660	73	3000	80	Phase dim	Switched
0005177	Start Spot Alu 760lm 840 IP65 BRA	Brushed Aluminium	9	760	84	4000	80	Phase dim	Switched

## Additional Images

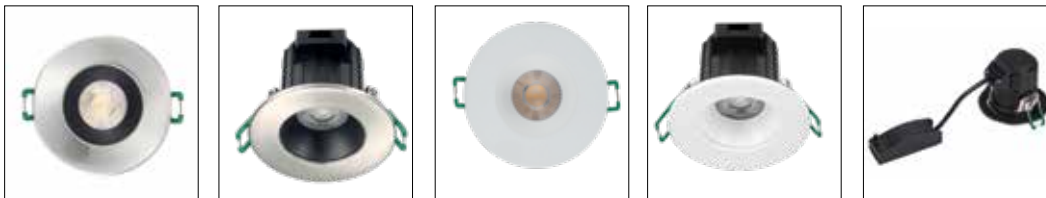


## Photometric Data


IP65 3000K White

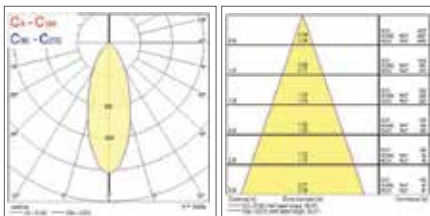

IP65 3000K Black

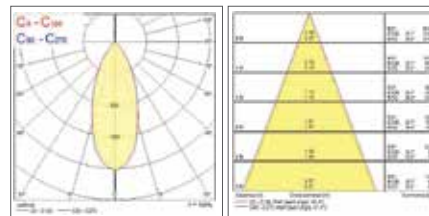

## Dimensions (mm)



# SYLVANIA



CE UK  
CA



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania International Group Kft.

Copyright Feilo Sylvania International Group Kft. November 2021

[sylvania-lighting.com](http://sylvania-lighting.com)

A Feilo Sylvania Company