

Start Spot Scoop

START SPOT SCOOP 4200LM 930 MB WHITE

0060586



Product features

- Recessed Adjustable Accent Downlight, integrated LED, die cast aluminium body, Ø205mm cut-out, CCT 3000K, SDCM<3, CRI90, 4200lm, total power consumption 48W, resulting in 88lm/W.





PRODUCT OVERVIEW

Product name	START SPOT SCOOP 4200LM 930 MB WHITE
Technology	LED
Housing	Aluminium
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276983
Warranty	5 years
Fixture luminous flux (lm)	4200
Luminaire efficacy (lm/W)	85
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	32
Photobiological Risk Group	RG1
Total power consumption (W)	48
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288605869

PHOTOMETRY

Start Spot Scoop

START SPOT SCOOP 4200LM 930 MB WHITE
0060586

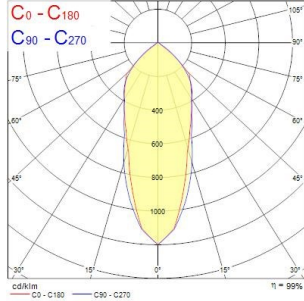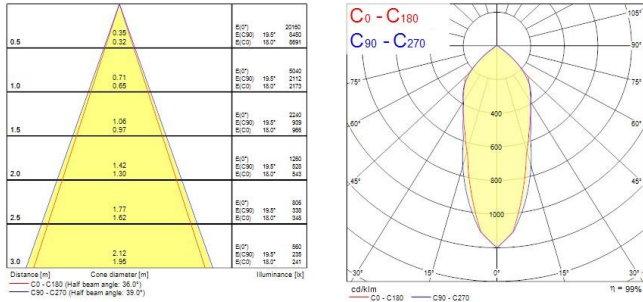

TECHNICAL DRAWINGS

