

## START Panel G4 600x600

START PANEL 600 3000K G4

0047778



### Product features

- LED back-lit recessed panel, 3000K Warm White, 3900lm delivered from 30W, 130lm/W total system efficiency, energy efficient external driver included as standard, even distribution of light throughout fixture, long lifetime of 50,000 hours (L70), size (HxWxD) 596x596x65mm.




### PRODUCT OVERVIEW

Product name	START PANEL 600 3000K G4
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4274178
Warranty	5 years
Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	130
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	107
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	30
Electrical protection	Class II
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288477787

### PHOTOMETRY

## START Panel G4 600x600 START PANEL 600 3000K G4 0047778

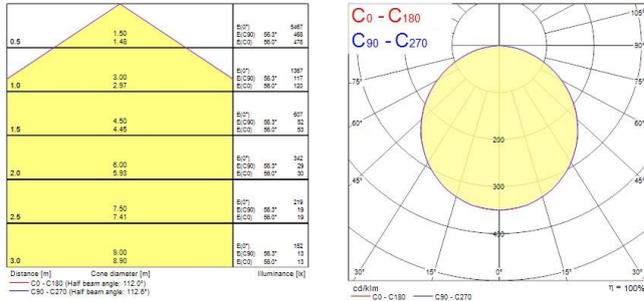

### TECHNICAL DRAWINGS

