

Lenzo S

LENZO S 15W 500LM 930 GLB O/B WHITE

0005522



Product features

- LENZO S 15W 500LM 930 GLB O/B WHITE



PRODUCT OVERVIEW

Product name	LENZO S 15W 500LM 930 GLB O/B WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4278117
Warranty	5 years
Fixture luminous flux (lm)	240/720
Luminaire efficacy (lm/W)	48
Colour temperature (K)	3000
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Photobiological Risk Group	RG1
Total power consumption (W)	15
Electrical protection	Class I
Dimmable	Yes
Minimum dimming level (%)	10
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20
IK rating	IK03
Product EAN number	5410288055220

DATA TABLE

General data

Product name	LENZO S 15W 500LM 930 GLB O/B WHITE
Technology	LED
Cap/Base	N/A
Housing	Aluminium
Mount	Track mounting

Lenzo S

LENZO S 15W 500LM 930 GLB O/B WHITE

0005522

General application	Museums & Galleries, Retail
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4278117
Warranty	5 years

Optical data

Fixture luminous flux (lm)	240/720
Luminaire efficacy (lm/W)	48
Colour temperature (K)	3000
Colour Code	930
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Distribution type	Symmetric
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	15
Mains voltage (V)	220-240V~
Electrical protection	Class I
Dimmable	Yes
Minimum dimming level (%)	10
Drive current (mA)	350
Inrush Current (A)	15
Inrush Duration (µs)	150
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	50
Max. Luminaires per 13A C Breaker	65
Max. Luminaires per 16A C Breaker	80
Max. Luminaires per 20A C Breaker	100

Lifetime data

Lifespan L70 B50	100000
Lifespan L70 B20	89000
Lifespan L70 B10	77000
Lifespan L80 B50	86000
Lifespan L80 B20	93000
Lifespan L80 B10	100000
Lifespan L90 B50	56000
Lifespan L90 B20	44000
Lifespan L90 B10	41000

Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP20

Lenzo S

LENZO S 15W 500LM 930 GLB O/B WHITE





0005522

IK rating	IK03
Diffuser finish	Diffuse
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	60
Nominal Product Width (mm)	60
Nominal Product Height (mm)	261
Nominal Product Diameter (mm)	60
Weight (kg)	0.57

Packaging

Single packaging type	Carton
Product EAN number	5410288055220
Packaging single length / height (cm)	29.0
Packaging single width (cm)	13.5
Packaging single depth (cm)	6.5
DUN14 (outer)	15410288055227
Units per outer package	4
Packaging outer length / height (cm)	28.5
Packaging outer width (cm)	14.5
Packaging outer depth (cm)	30.5

PHOTOMETRY

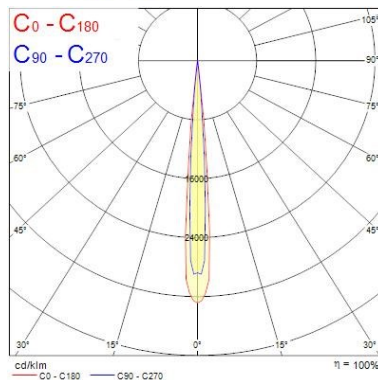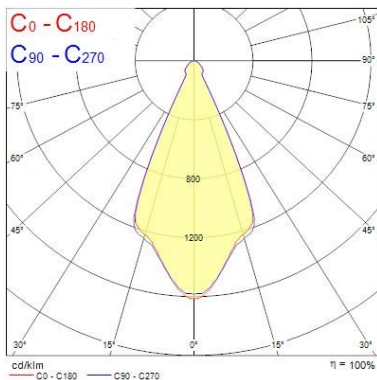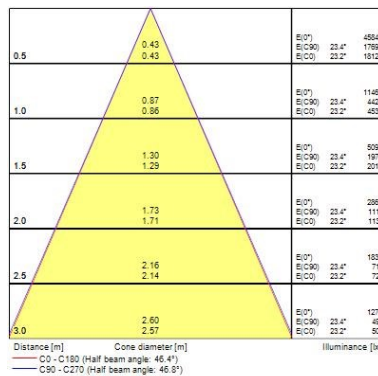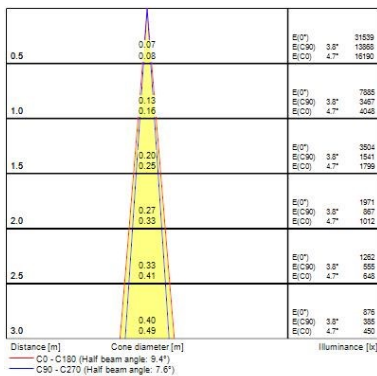

Lenzo S

LENZO S 15W 500LM 930 GLB O/B WHITE

0005522

TECHNICAL DRAWINGS

