


## SylFlat LED Non Dimmable - Recessed

SYLFLAT 2000 ROUND 4000K  
0053297



### Product features

- Integrated round recessed 220mm diameter LED downlight providing uniform distribution with an opal diffuser, 110° beam angle, 2000LM, 22W, 91lm/W, 4000K, CRI80, non-dimmable, IP20, IK03, 30,000hrs (L70)

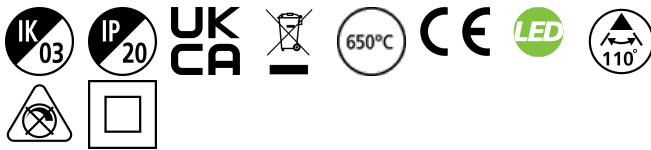

### PRODUCT OVERVIEW

Product name	SYLFLAT 2000 ROUND 4000K
Technology	LED
Housing	Other
Mount	Ceiling recessed mounting
Environment	Internal
General application	Residential & Consumer
ETIM Class	EC001744
E-number FI	4274336
E-number SE	7470763
Warranty	3 years
Fixture luminous flux (lm)	2000
Luminaire efficacy (lm/W)	91
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	22
Electrical protection	Class II
Control gear type	Electronic ballast
Control gear mounting	Integrated
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288532974


## SylFlat LED Non Dimmable - Recessed SYLFLAT 2000 ROUND 4000K 0053297

### PHOTOMETRY

0.5	1.00 1.00	E(0°) E(C90) E(C180)	2814 241 251
1.0	3.00 3.00	E(0°) E(C90) E(C180)	702 60 58
1.5	4.50 4.50	E(0°) E(C90) E(C180)	313 37 25
2.0	6.00 6.00	E(0°) E(C90) E(C180)	176 15 15
2.5	7.50 7.50	E(0°) E(C90) E(C180)	113 10 8
3.0	9.00 9.00	E(0°) E(C90) E(C180)	78 7 7

Distance [m]    Core diameter [m]    Illuminance [lx]

— C0 - C180 (Half beam angle: 112.8°)  
— C90 - C270 (Half beam angle: 112.8°)



### TECHNICAL DRAWINGS

