

## START eco Downlight 95mm Round Recessed

*START eco Downlight 95 640lm 830*  
0053910



### Product features

- START eco Downlight is an integrated LED recessed downlight with built-in non dimmable driver; Loop in loop out connector allows for quick installation; 8W; 640Lm; 80Lm/W; 3000K.



### PRODUCT OVERVIEW

Product name	START eco Downlight 95 640lm 830
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
ETIM Class	EC001744
Warranty	3 years
Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Glare control	< 28
Photobiological Risk Group	RG0
Total power consumption (W)	8
Electrical protection	Class II
Dimmable	No
LED Flickering Rate	Medium (21% - 40%)
Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Product EAN number	5410288539102

### DATA TABLE

#### General data

Product name	START eco Downlight 95 640lm 830
Technology	LED
Housing	PC Polycarbonate
Mount	Ceiling recessed mounting
General application	Retail
Operating temperature range (°C)	0°C - 40°C

## START eco Downlight 95mm Round Recessed

*START eco Downlight 95 640lm 830*  
0053910

Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
Warranty	3 years

### Optical data

Fixture luminous flux (lm)	640
Luminaire efficacy (lm/W)	80
Colour temperature (K)	3000
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	110
Distribution type	Symmetric
Glare control	< 28
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	8
Mains voltage (V)	220-240V~
Lamp power factor	0.5
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	115.0
Electrical protection	Class II
Control gear required	No
Dimmable	No
Drive current (mA)	58
Inrush Current (A)	7
Inrush Duration (µs)	160
Glow Wire Test (°C)	650
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Medium (21% - 40%)
Max. Luminaires per 10A C Breaker	140
Max. Luminaires per 13A C Breaker	183
Max. Luminaires per 16A C Breaker	226
Max. Luminaires per 20A C Breaker	283
Max. Luminaires per 10A B Breaker	83
Max. Luminaires per 13A B Breaker	109
Max. Luminaires per 16A B Breaker	135
Max. Luminaires per 20A B Breaker	169

### Lifetime data

Lifespan L70 B50	30000
------------------	-------

### Physical data

Housing colour	RAL 9003 - Signal white
IP rating	IP20
IK rating	IK02
Diffuser finish	Opal

## START eco Downlight 95mm Round Recessed

*START eco Downlight 95 640lm 830*  
0053910

Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	115
Nominal Product Width (mm)	115
Nominal Product Height (mm)	34
Nominal Product Diameter (mm)	115
Cutout Dimensions (W x L in mm or Diameter in mm)	95
Weight (kg)	0.08


### Packaging

Single packaging type	Carton
Product EAN number	5410288539102
Packaging single length / height (cm)	11.7
Packaging single width (cm)	4.0
Packaging single depth (cm)	13.0
DUN14 (outer)	15410288539109
Units per outer package	50
Packaging outer length / height (cm)	60.0
Packaging outer width (cm)	27.5
Packaging outer depth (cm)	22.0

### Safety data

Optimal operating condition (°C)	0-40
----------------------------------	------

## PHOTOMETRY

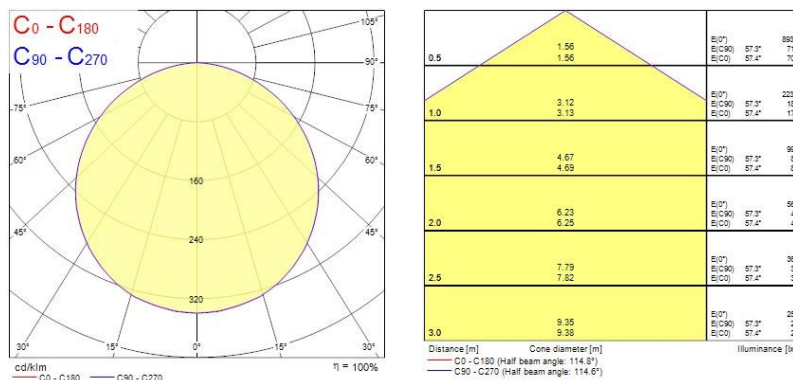

## TECHNICAL DRAWINGS

