



Good performance, no fuss



START eco Downlight

The Start eco Downlight is a non dimmable family of downlights that provides the perfect integrated LED solution for the replacement of traditional CFL downlights. The range is available in both round and square bodies and in recessed and surface mounted versions providing flexibility for different application areas.

START eco Downlight



Features

- Available in 8W, 12W, 15W & 24W, recessed and surface mounted versions
- Ideal for applications such as corridors, back of houses and any locations that require long service hours
- Available in round or square form factor with integrated, non dimmable driver
- Back lit LED design and opal diffuser provides uniform light distribution
- Choice of 3000K (Warm White) or 4000K (Neutral White)
- Slim design: recessed depth as low as <38mm, surface mounted height of 45mm
- MacAdam Ellipse: 6
- Voltage: 220-240V
- Housing colour/bezel: White-RAL9003
- Construction material: PC Polycarbonate
- Photobiological Risk Group: 0



START eco Downlight recessed round




START eco Downlight recessed square

Product information


Code	Description	Finish	Fixture Power (W)	Luminous Flux (lm)	Efficacy (lm/W)	Beam Angle (°)	Colour Temp (K)	CRI	Dimmable	Control Technology	Average Rated Life (Hrs)
START eco Downlight - Recessed											
3000K											
0053910	START eco Downlight 95 640lm 830	White	8	640	80	110	3000	80	No	Switched	30,000
0053911	START eco Downlight 145 950lm 830	White	12	950	79	110	3000	80	No	Switched	30,000
0053912	START eco Downlight 195 1250lm 830	White	15	1250	83	110	3000	80	No	Switched	30,000
0053913	START eco Downlight 195 2100lm 830	White	24	2100	88	110	3000	80	No	Switched	30,000
0053924	START eco Downlight 195 Square 1400lm 830	White	15	1400	93	110	3000	80	No	Switched	30,000
4000K											
0053914	START eco Downlight 95 640lm 840	White	8	640	80	110	4000	80	No	Switched	30,000
0053915	START eco Downlight 145 950lm 840	White	12	950	79	110	4000	80	No	Switched	30,000
0053916	START eco Downlight 195 1250lm 840	White	15	1250	83	110	4000	80	No	Switched	30,000
0053917	START eco Downlight 195 2100lm 840	White	24	2100	88	110	4000	80	No	Switched	30,000
0053927	START eco Downlight 195 Square 1400lm 840	White	15	1400	93	110	4000	80	No	Switched	30,000
START eco Downlight - Surface Mounted											
3000K											
0054103	START eco Downlight 165 950lm 830 Surface	White	12	950	79	110	3000	80	No	Switched	30,000
0054104	START eco Downlight 215 1250lm 830 Surface	White	15	1250	83	110	3000	80	No	Switched	30,000
0054105	START eco Downlight 215 2100lm 830 Surface	White	24	2100	88	110	3000	80	No	Switched	30,000
0054113	START eco Downlight 215 Square 1400lm 830 Surface	White	15	1400	93	110	3000	80	No	Switched	30,000
4000K											
0054106	START eco Downlight 165 950lm 840 Surface	White	12	950	79	110	4000	80	No	Switched	30,000
0054107	START eco Downlight 215 1250lm 840 Surface	White	15	1250	83	110	4000	80	No	Switched	30,000
0054108	START eco Downlight 215 2100lm 840 Surface	White	24	2100	88	110	4000	80	No	Switched	30,000
0054115	START eco Downlight 215 Square 1400lm 840 Surface	White	15	1400	93	110	4000	80	No	Switched	30,000

Photometric data

START eco Downlight round

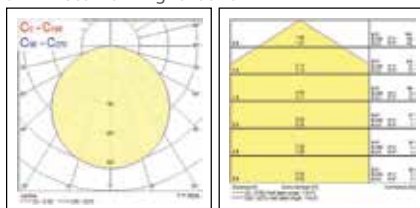

Start eco Downlight square

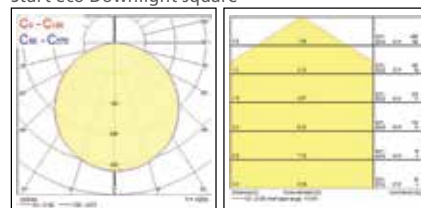


START eco Downlight



Additional Images


START eco Downlight recessed round

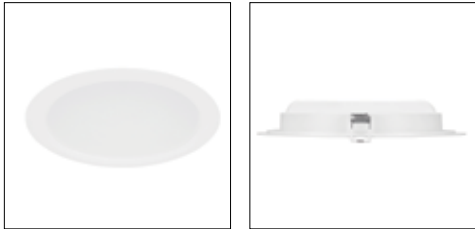

START eco Downlight recessed square



START eco Downlight surface mounted round

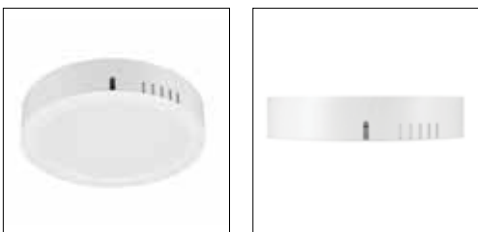


START eco Downlight surface mounted square




Dimensions (mm)

START eco Downlight recessed non dimmable

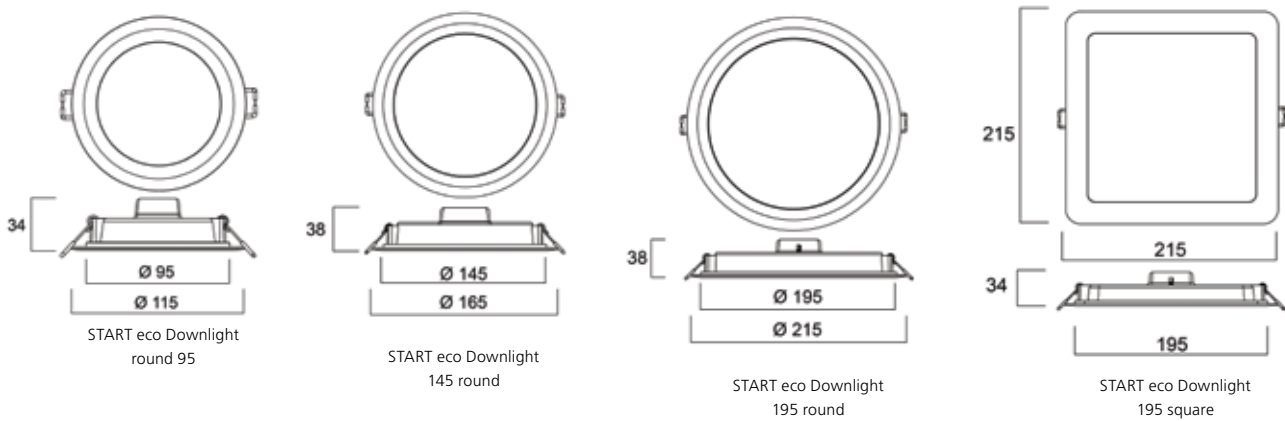

START eco Downlight surface mounted

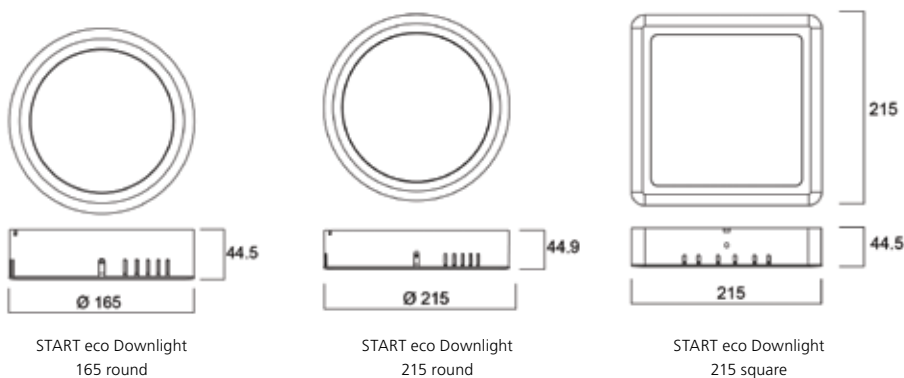



Although every effort has been made to ensure accuracy in the compilation of the technical detail within this publication, specifications and performance data are constantly changing. Current details should therefore be checked with Feilo Sylvania Europe Limited.

Copyright Feilo Sylvania International Group Kft. July 2020

sylvania-lighting.com

A Feilo Sylvania Company