

Start Highbay

START Highbay IP65 1-10V 26000lm 840 MB

0039346



Product features

- START Highbay, includes 1 m cables, black aluminium housing, 26,000 Lm, 200 W, 130 Lm/W, 4000 K, drive current: 5000 mA, CRI 80, 60° beam angle, 1-10 V dimmable, IP65, IK08, 54,000 hrs (L80/B50), (D x H) 339 x 194 mm, 1 m mains cable, 1 m control cable, 1.2 m chain length including hooks



PRODUCT OVERVIEW

| | |
|---------------------------------|---|
| Product name | START Highbay IP65 1-10V 26000lm 840 MB |
| Technology | LED |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Logistics & Industry |
| ETIM Class | EC001716 |
| E-number FI | 4306964 |
| E-number SE | 7214418 |
| Warranty | 5 years |
| Fixture luminous flux (lm) | 26000 |
| Luminaire efficacy (lm/W) | 130 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Beam Angle (°) | 60 |
| Glare control | < 22 |
| Photobiological Risk Group | RG1 |
| Total power consumption (W) | 200 |
| Electrical protection | Class I |
| Control gear type | Other |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| LED Flickering Rate | Ultra low (5% or less) |
| Housing colour | Black |
| IP rating | IP65 |
| IK rating | IK08 |
| Product EAN number | 5410288393469 |

DATA TABLE

General data

Start Highbay

START Highbay IP65 1-10V 26000lm 840 MB

0039346

| | |
|---|---|
| Product name | START Highbay IP65 1-10V 26000lm 840 MB |
| Technology | LED |
| Housing | Aluminium |
| Mount | Suspended |
| General application | Logistics & Industry |
| Operating temperature range (°C) | -30°C - 50°C |
| Performance ambient temperature Tq (°C) | 25 |
| ETIM Class | EC001716 |
| E-number FI | 4306964 |
| E-number SE | 7214418 |
| Warranty | 5 years |

Optical data

| | |
|---------------------------------|---------------|
| Fixture luminous flux (lm) | 26000 |
| Luminaire efficacy (lm/W) | 130 |
| Colour temperature (K) | 4000 |
| Light colour | Neutral White |
| CRI (Ra) | 80 |
| Colour Variation Initial (SDCM) | SDCM6 |
| Beam Angle (°) | 60 |
| Distribution type | Direct |
| Glare control | < 22 |
| Photobiological Risk Group | RG1 |

Electrical data

| | |
|--|------------------------|
| Total power consumption (W) | 200 |
| Mains voltage (V) | 220-240V~ |
| Lamp power factor | 0.95 |
| THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x % | 10 |
| Electrical protection | Class I |
| Control gear type | Other |
| Dimmable | Yes |
| Minimum dimming level (%) | 1 |
| Drive current (mA) | 5000 |
| Inrush Current (A) | 60 |
| Inrush Duration (µs) | 300 |
| Glow Wire Test (°C) | 650 |
| Nominal Frequency (Hz) | 50/60Hz |
| LED Flickering Rate | Ultra low (5% or less) |
| Max. Luminaires per 10A C Breaker | 6 |
| Max. Luminaires per 13A C Breaker | 8 |
| Max. Luminaires per 16A C Breaker | 9 |
| Max. Luminaires per 20A C Breaker | 10 |
| Max. Luminaires per 10A B Breaker | 3 |
| Max. Luminaires per 13A B Breaker | 4 |
| Max. Luminaires per 16A B Breaker | 5 |
| Max. Luminaires per 20A B Breaker | 7 |

Start Highbay

START Highbay IP65 1-10V 26000lm 840 MB

0039346

Lifetime data

| | |
|------------------|-------|
| Lifespan L70 B50 | 54000 |
| Lifespan L70 B20 | 54000 |
| Lifespan L70 B10 | 54000 |
| Lifespan L80 B50 | 54000 |
| Lifespan L80 B20 | 54000 |
| Lifespan L80 B10 | 54000 |
| Lifespan L90 B50 | 54000 |
| Lifespan L90 B20 | 54000 |
| Lifespan L90 B10 | 50000 |

Physical data

| | |
|-------------------------------|------------------|
| Housing colour | Black |
| IP rating | IP65 |
| IK rating | IK08 |
| Diffuser finish | Transparent |
| Diffuser material | PC Polycarbonate |
| Nominal Product Length (mm) | 339 |
| Nominal Product Width (mm) | 339 |
| Nominal Product Height (mm) | 194 |
| Nominal Product Diameter (mm) | 339 |
| Weight (kg) | 3.7 |

Packaging

| | |
|---------------------------------------|----------------|
| Single packaging type | Carton |
| Product EAN number | 5410288393469 |
| Packaging single length / height (cm) | 40.0 |
| Packaging single width (cm) | 40.0 |
| Packaging single depth (cm) | 18.7 |
| DUN14 (outer) | 05410288393469 |
| Units per outer package | 1 |
| Packaging outer length / height (cm) | 40.0 |
| Packaging outer width (cm) | 40.0 |
| Packaging outer depth (cm) | 18.7 |









Safety data

| | |
|----------------------------------|--------|
| Optimal operating condition (°C) | -30-50 |
|----------------------------------|--------|

PHOTOMETRY

Start Highbay

START Highbay IP65 1-10V 26000lm 840 MB
0039346

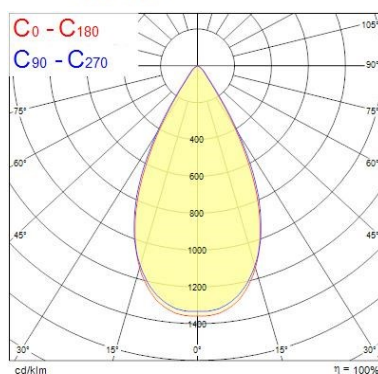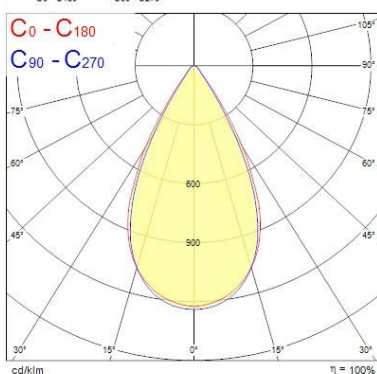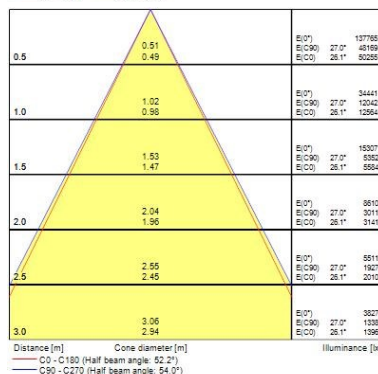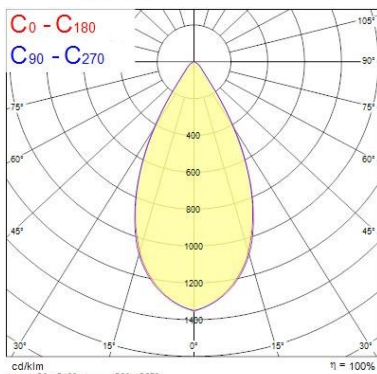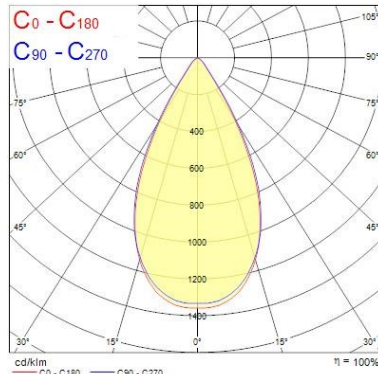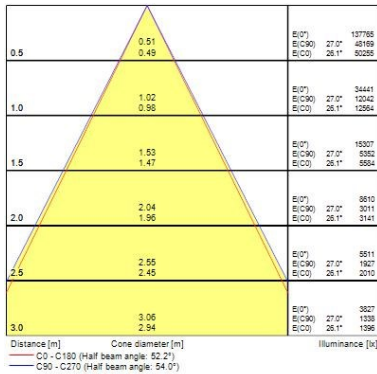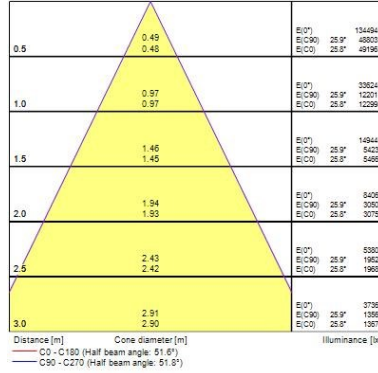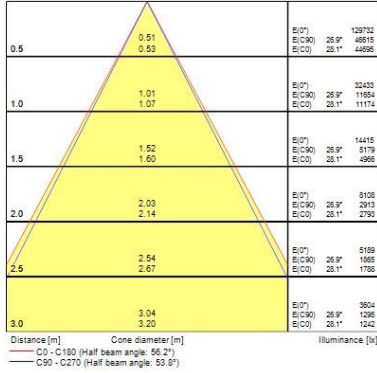

Start Highbay

START Highbay IP65 1-10V 26000lm 840 MB

0039346

TECHNICAL DRAWINGS

