


## DeltaWing LED - DALI dimmable

*DELTAWING LED40 DALI 4K 1200*  
0044883



### Product features

- Low profile surface and suspended LED diffuser luminaire, 1218mm x 200mm, 4000K Neutral White, DALI dimmable, 4030lm, 36W, lifespan: 55,000 hours L90B10, A++ A+ A

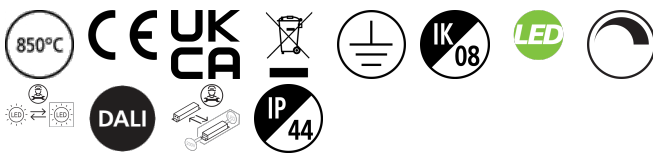

### PRODUCT OVERVIEW

Product name	DELTAWING LED40 DALI 4K 1200
Technology	LED
Cap/Base	N/A
Housing	Steel
Mount	Ceiling surface mounting, Suspended
Environment	Internal
General application	Education, Hospitality, Logistics & Industry, Office, Retail
ETIM Class	EC002892
E-number FI	4274309
E-number SE	7014024
Warranty	5 years
Fixture luminous flux (lm)	4030
Luminaire efficacy (lm/W)	111.94
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Beam Angle (°)	103
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	36
Product Voltage (V)	240
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	95
Housing colour	White
IP rating	IP44
IK rating	IK08
Product EAN number	5410288448831


## DeltaWing LED - DALI dimmable DELTA WING LED40 DALI 4K 1200 0044883

### PHOTOMETRY

0.5	1.27 1.46	E(0°) E(C90) E(C180)	1115 809 891
1.0	2.53 2.91	E(0°) E(C90) E(C180)	1279 105 117
1.5	3.80 4.37	E(0°) E(C90) E(C180)	988 81 82
2.0	5.06 5.82	E(0°) E(C90) E(C180)	741 60 62
2.5	6.33 7.28	E(0°) E(C90) E(C180)	585 47 49
3.0	7.60 8.73	E(0°) E(C90) E(C180)	442 35 37

Distance [m]      Core diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 111.9°)  
— C90 - C270 (Half beam angle: 103.4°)



### TECHNICAL DRAWINGS

