

SylFast T5

SylFast FHE 1x35W T16 G5

0046304



Product features

- T5 fluorescent batten made from roll-formed steel. With punch out conduit holes on both ends and 3 pole terminal block. White body. For use with T5 lamps (ordered separately). IP20. IK02. 220-240V. Class 1. Electronic ballast (non-dimmable).



PRODUCT OVERVIEW

Product name	SylFast FHE 1x35W T16 G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109
E-number Norway	3344203
Warranty	2 years
Fixture luminous flux (lm)	3008
LOR (%)	94
Light colour	N/A
Total power consumption (W)	39
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Dimmable	No
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288463049

DATA TABLE

General data

Product name	SylFast FHE 1x35W T16 G5
Technology	Fluorescent
Cap/Base	G5
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
ETIM Class	EC000109

SylFast T5

SylFast FHE 1x35W T16 G5
0046304

E-number Norway	3344203
Warranty	2 years

Optical data

Fixture luminous flux (lm)	3008
LOR (%)	94
Light colour	N/A
Adjustable chromaticity	N
Distribution type	Symmetric

Electrical data

Total power consumption (W)	39
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Dimmable	No
Glow Wire Test (°C)	960
Nominal Frequency (Hz)	50/60Hz

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1478
Nominal Product Width (mm)	33
Nominal Product Height (mm)	64
Weight (kg)	1.292




Packaging

Single packaging type	Plastic
Product EAN number	5410288463049
Packaging single length / height (cm)	154.61
Packaging single width (cm)	5.21
Packaging single depth (cm)	5.31
DUN14 (outer)	05410288463049
Units per outer package	5
Packaging outer length / height (cm)	155.12
Packaging outer width (cm)	10.52
Packaging outer depth (cm)	16.0

PHOTOMETRY

SylFast T5

SylFast FHE 1x35W T16 G5
0046304

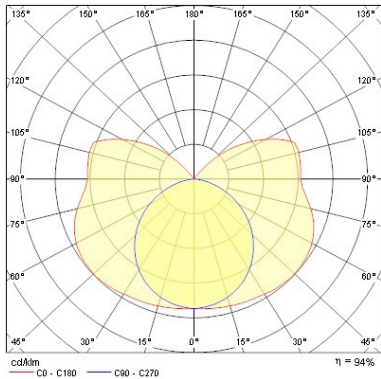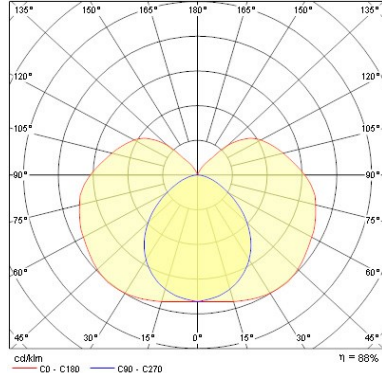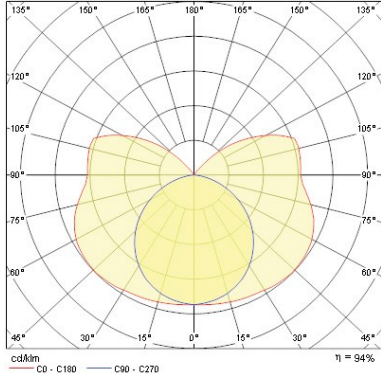

TECHNICAL DRAWINGS

