


DIMENSIONS (mm)

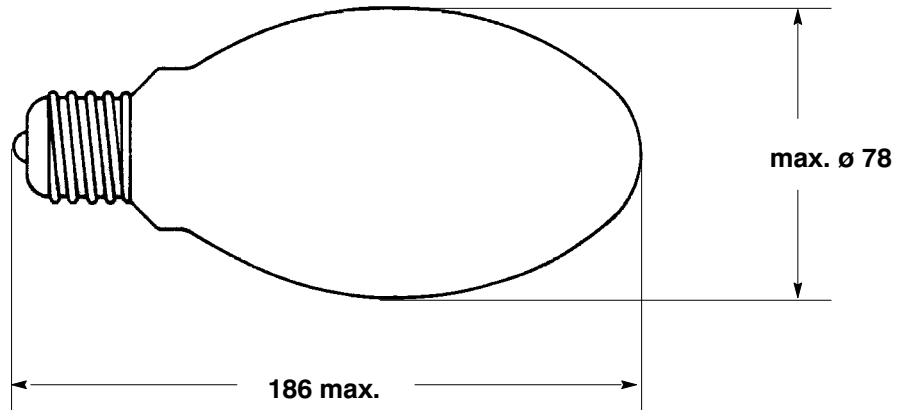

Cap : E40/45 (IEC 61-1)
Bulb : soft glass coated

ELECTRICAL DATA:		NOMINAL VALUE	MIN.	MAX.
Lamp Wattage	(W) :	100		
Lamp Voltage	(V) :	100	85	115
Lamp Current	(A) :	1.2		
Lamp Warm-up current	(A) :		1.2	2.4

OPERATING CONDITIONS:

Burning Position	:	any		
Ballast Type	:	SHP-100W/220V, 230V, 240V, 250V		
Voltage/Current ratio	:	148		
Calibration Current	(A) :	1.2		
Supply Voltage	(%) :		92	106
Ignitor Pulse	(kVp) :		2.8	5.0
Compensation Capacitor	(mF) :	12		
Cap Rim Temperature	(\square C) :			210
Bulb Temperature	(\square C) :			310

LAMP LIFE:

Rated Average Life	(h) :	55000 (50 % survival rate)
T 90	(h) :	24000 (90 % survival rate)

PHOTOMETRIC DATA :

Initial Luminous Flux	(lm) :	9500
Luminous Efficacy	(lm/W) :	95
Correlated Colour Temperature	(K) :	2050
Colour Rendering Index	(class) :	4

ATTENTION : Lamps comply with the requirements of IEC publication 60662. Ballasts and ignitors must comply with IEC 60923 and 60927 respectively. Luminaires must be in accordance with IEC 60598-1 and 60598-2-3. Inspection is in accordance with IEC 60410.

Issued by : TIENEN
Date : 24.02.1994
Revision date : 21.04.2009

DATA SHEET

Specification No. : 45 09 100/E
Supersedes : 4509100/D 01.10.2007
Page 1 of 1