

Sterling Bulkhead - LED

Sterling Bulkhead 4000K Black
4054992



PRODUCT OVERVIEW

Product name	Sterling Bulkhead 4000K Black
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
E-number FI	4579219
Colour temperature (K)	4000
Control gear mounting	Integral
Housing colour	Black
IP rating	IP55
IK rating	IK09
Product EAN number	5026524549929

DATA TABLE

General data

Product name	Sterling Bulkhead 4000K Black
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Hospitality, Logistics & Industry, Office
ETIM Class	EC002892
E-number FI	4579219

Optical data

Colour temperature (K)	4000
Correlated colour temperature range (K)	4000 - 4000
Adjustable chromaticity	N
Distribution type	Symmetric

Sterling Bulkhead - LED

Sterling Bulkhead 4000K Black
4054992

Electrical data

Mains voltage (V)	230V~
Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350


Physical data

Housing colour	Black
IP rating	IP55
IK rating	IK09
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Height (mm)	128
Max. Lamp Diameter (mm) - D	350
Weight (kg)	3.4

Packaging

Single packaging type	Carton
Product EAN number	5026524549929
Packaging single length / height (cm)	36.0
Packaging single width (cm)	36.0
Packaging single depth (cm)	13.5
DUN14 (outer)	05026524549929
Units per outer package	1
Packaging outer length / height (cm)	36.0
Packaging outer width (cm)	36.0
Packaging outer depth (cm)	13.5

PHOTOMETRY

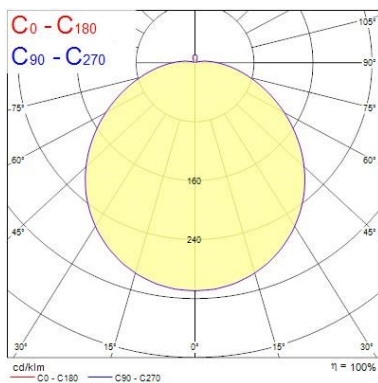


Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]	Illuminance [lx]
0.5	1.55	1707	57.2°	136	
1.0	3.10	427	57.2°	34	
1.5	4.65	190	57.2°	15	
2.0	6.21	107	57.2°	8	
2.5	7.76	68	57.2°	5	
3.0	9.31	47	57.2°	4	

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 114.4°)

Sterling Bulkhead - LED

Sterling Bulkhead 4000K Black
4054992

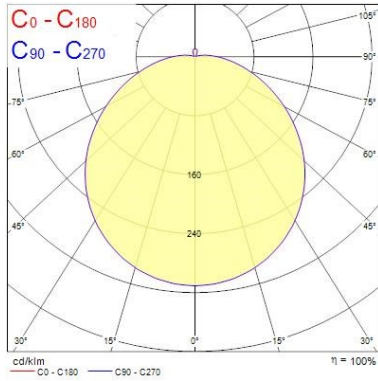

0.5	1.56	E(0°) E(C0)	57.3°	909 12
1.0	3.12	E(0°) E(C0)	57.3°	227 15
1.5	4.67	E(0°) E(C0)	57.3°	101 8
2.0	6.23	E(0°) E(C0)	57.3°	57 4
2.5	7.79	E(0°) E(C0)	57.3°	36 3
3.0	9.35	E(0°) E(C0)	57.3°	25 1

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 114.6°)

TECHNICAL DRAWINGS

