


## Start Tubular - Electronic & Microwave sensor

Start Tubular IP66 249 EB MW 830

0042338

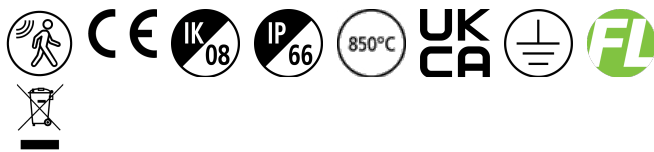

### PRODUCT OVERVIEW

Product name	Start Tubular IP66 249 EB MW 830
Technology	Fluorescent
Housing	PC Polycarbonate
Environment	Interior
General application	Hospitality, Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	6245
Luminaire efficacy (lm/W)	72
LOR (%)	75
Colour temperature (K)	3000
Light colour	Warm White
Total power consumption (W)	87
Electrical protection	Class I
Control gear type	Electronic ballast
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK08
Product EAN number	5410288423388
Light source included	0002778

### DATA TABLE

#### General data

Product name	Start Tubular IP66 249 EB MW 830
Technology	Fluorescent
Housing	PC Polycarbonate
Environment	Interior
General application	Hospitality, Logistics & Industry
Operating temperature range (°C)	0°C - 25°C
ETIM Class	EC000109

#### Optical data

Fixture luminous flux (lm)	6245
----------------------------	------

## Start Tubular - Electronic & Microwave sensor

*Start Tubular IP66 249 EB MW 830*

0042338

Luminaire efficacy (lm/W)	72
LOR (%)	75
Colour temperature (K)	3000
Light colour	Warm White
Adjustable chromaticity	N
Distribution type	Direct

### Electrical data

Total power consumption (W)	87
Mains voltage (V)	220-240V~
Electrical protection	Class I
Control gear type	Electronic ballast
Transformer required	Yes
Glow Wire Test (°C)	850
Energy Efficiency Class (A->G) of contained light source	F
Nominal Frequency (Hz)	50/60Hz

### Physical data

Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP66
IK rating	IK08
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	1578
Nominal Product Width (mm)	118
Nominal Product Height (mm)	119
Weight (kg)	3.1

### Packaging

Single packaging type	Carton
Product EAN number	5410288423388
Packaging single length / height (cm)	160.0
Packaging single width (cm)	13.0
Packaging single depth (cm)	13.0
DUN14 (outer)	05410288423388
Units per outer package	1
Packaging outer length / height (cm)	160.0
Packaging outer width (cm)	13.0
Packaging outer depth (cm)	13.0

### Safety data

Optimal operating condition (°C)	0-25
----------------------------------	------

## PHOTOMETRY

## Start Tubular - Electronic & Microwave sensor

*Start Tubular IP66 249 EB MW 830*  
0042338

---

### TECHNICAL DRAWINGS

---

