

START Panel Flat 600x600


START FLAT PANEL LED 600 3000K DALI G2

0047752



Product features

- Edge lit LED flat panel. Low Flicker, 39 W, Warm White, 3000 K, 3900 lumens, 100 lm/W, 50000 hours lifetime (L70), PMMA opal diffuser, aluminium frame, steel body, TRIDONIC DALI driver (push dim). (HxWxD) 10.5 x 595 x 595 mm

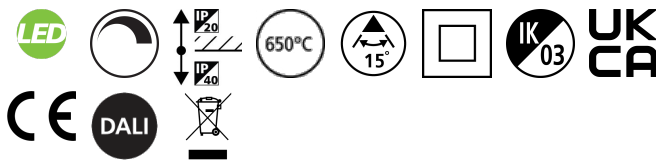


PRODUCT OVERVIEW

Product name	START FLAT PANEL LED 600 3000K DALI G2
Technology	LED
Housing	Aluminium
Mount	Ceiling recessed mounting
Environment	Internal
General application	Education, Hospitality, Office, Retail
ETIM Class	EC002892
E-number FI	4274124
Warranty	5 years
Fixture luminous flux (lm)	3900
Luminaire efficacy (lm/W)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	15
Glare control	< 22
Photobiological Risk Group	RG0
Total power consumption (W)	39
Electrical protection	Class II
Control gear type	Electronic ballast
Dimmable	Yes
LED Flickering Rate	Ultra low (5% or less)
Housing colour	White
IP rating	IP40/20
IK rating	IK03
Product EAN number	5410288477527

PHOTOMETRY

START Panel Flat 600x600
START FLAT PANEL LED 600 3000K DALI G2
0047752

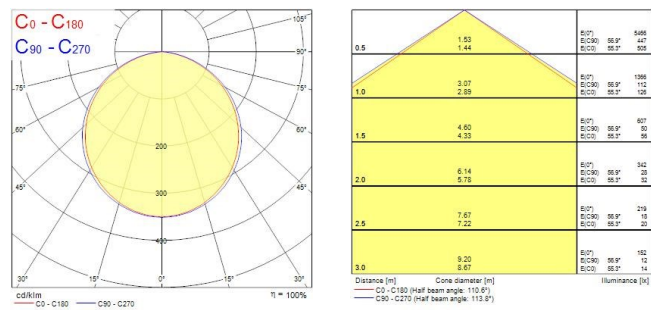

TECHNICAL DRAWINGS

