

Pixo Mini Track


Pixo Mini TRACK 490lm 927 MB WHITE

0006156



Product features

- Integrated LED spotlight, Textured White - RAL9016, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 40°, color temperature: 2700K, total system power: 6.5W, total fixture output: 490 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, electronic driver, non-dimmable, low LED flicker rate (6%-20%), power factor: >0.90, electrical protection: Class I, Global Track 3 Circuit GA69 adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø41.5x125, weight: 0.189kg.

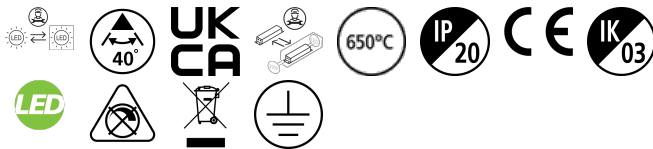

PRODUCT OVERVIEW


Product name	Pixo Mini TRACK 490lm 927 MB WHITE
Technology	LED
Housing	Aluminium
General application	Museums & Galleries, Retail
ETIM Class	EC001744
E-number FI	4278252
Warranty	5 years
Fixture luminous flux (lm)	490
Luminaire efficacy (lm/W)	75
Colour temperature (K)	2700
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM5
Beam Angle (°)	40
Photobiological Risk Group	RG1
Total power consumption (W)	6.5
Electrical protection	Class I
Dimmable	No
Minimum dimming level (%)	100
LED Flickering Rate	Low (6% - 20%)
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288061566

PHOTOMETRY

Pixo Mini Track

Pixo Mini TRACK 490lm 927 MB WHITE

0006156



Distance [m]	Cone diameter [m]	E0° [lx]	E(C90) 19.1° [lx]	E(C0) 19.2° [lx]
0.5	0.35 0.35	455	1901	1921
1.0	0.69 0.70	1138	476	480
1.5	1.04 1.04	508	211	213
2.0	1.39 1.39	284	119	120
2.5	1.72 1.74	162	75	77
3.0	2.06 2.09	105	53	53

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 38.4°)
— C90 - C270 (Half beam angle: 38.2°)

TECHNICAL DRAWINGS

