

SylFast T8

SylFast T8 1x58W EB (Electronic Ballast)

0046102



Product features

- T8 fluorescent batten made from roll-formed steel. With punch out conduit holes on both ends and 3 pole terminal block. White body. For use with T8 lamps (ordered separately). IP20. IK02. 220-240V. Class 1. Electronic ballast (non-dimmable).



PRODUCT OVERVIEW

Product name	SylFast T8 1x58W EB (Electronic Ballast)
Technology	Fluorescent
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
Warranty	2 years
Electrical protection	Class I
Control gear type	Electronic ballast
Control gear mounting	Integral
Housing colour	White
IP rating	IP20
IK rating	IK02
Product EAN number	5410288461021

DATA TABLE

General data

Product name	SylFast T8 1x58W EB (Electronic Ballast)
Technology	Fluorescent
Housing	Steel
Mount	Ceiling surface mounting
Environment	Internal
General application	Logistics & Industry
Operating temperature range (°C)	-25°C - 55°C
Warranty	2 years

Optical data

Adjustable chromaticity	N
Distribution type	Symmetric

Electrical data

Mains voltage (V)	220-240V~
Electrical protection	Class I

SylFast T8

SylFast T8 1x58W EB (Electronic Ballast)

0046102

Control gear type	Electronic ballast
Control gear mounting	Integral
Transformer required	Yes
Glow Wire Test (°C)	850
Nominal Frequency (Hz)	50Hz

Physical data

Housing colour	White
IP rating	IP20
IK rating	IK02
Nominal Product Length (mm)	1527
Nominal Product Width (mm)	51
Nominal Product Height (mm)	74
Weight (kg)	1.219


Packaging

Single packaging type	Without Packaging
Product EAN number	5410288461021
Packaging single length / height (cm)	152.83
Packaging single width (cm)	4.07
Packaging single depth (cm)	4.9
DUN14 (outer)	15410288461028
Units per outer package	6
Packaging outer length / height (cm)	153.6
Packaging outer width (cm)	10.8
Packaging outer depth (cm)	16.0

Safety data

Optimal operating condition (°C)	-25-55
----------------------------------	--------

PHOTOMETRY

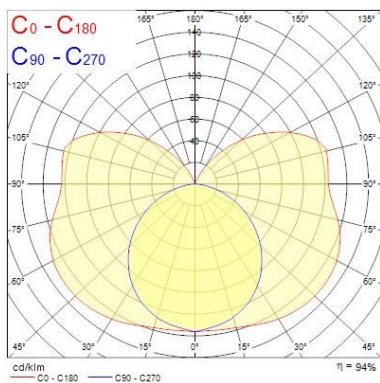

TECHNICAL DRAWINGS

