

## Hydroproof LED G3 fixed output HYDROPROOF LED G3 600mm Single 4K 0048769



### Product features

- Hydroproof, integrated LED chemical resistant weatherproof luminaire, with UV stabilized flat diffuser and linear prisms designed to achieve uniform lit appearance, optimise light output and to reduce glare, stainless steel diffuser clips and fixing brackets for surface and wall mounting. GRP housing, PMMA diffuser, Non dimmable, 4000K, CRI80, 1900 lm, 14 W, 135 lm/W, nominal average life (h):50000, energy class: A++ A+ A Class I, IK02, IP65.



### PRODUCT OVERVIEW

Product name	HYDROPROOF LED G3 600mm Single 4K
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting
General application	Logistics & Industry
ETIM Class	EC000109
E-number FI	4306977
Warranty	5 years
Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Photobiological Risk Group	RG0
Total power consumption (W)	14
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	No
Housing colour	Grey
IP rating	IP65
IK rating	IK02
Product EAN number	5410288487694

### DATA TABLE

#### General data

Product name	HYDROPROOF LED G3 600mm Single 4K
Technology	LED
Housing	Polyester
Mount	Ceiling surface mounting

## Hydroproof LED G3 fixed output HYDROPROOF LED G3 600mm Single 4K 0048769

General application	Logistics & Industry
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC000109
E-number FI	4306977
Warranty	5 years

### Optical data

Fixture luminous flux (lm)	1900
Luminaire efficacy (lm/W)	135
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	100
Distribution type	Direct
Photobiological Risk Group	RG0

### Electrical data

Total power consumption (W)	14
Mains voltage (V)	220-240V~
Lamp power factor	0.93
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Mains frequency (Hz)	0/50/60Hz
Electrical protection	Class I
Control gear required	No
Control gear type	LED driver constant current
Dimmable	No
Drive current (mA)	300
Inrush Current (A)	3.06
Inrush Duration (µs)	35
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	104
Max. Luminaires per 13A C Breaker	139
Max. Luminaires per 16A C Breaker	173
Max. Luminaires per 20A C Breaker	208
Max. Luminaires per 10A B Breaker	87
Max. Luminaires per 13A B Breaker	113
Max. Luminaires per 16A B Breaker	139
Max. Luminaires per 20A B Breaker	173

### Lifetime data

Lifespan L70 B50	60000
Lifespan L80 B10	60000
Lifespan L90 B50	60000

## Hydroproof LED G3 fixed output HYDROPROOF LED G3 600mm Single 4K 0048769

### Physical data

Housing colour	Grey
IP rating	IP65
IK rating	IK02
Diffuser finish	Transparent
Diffuser material	PMMA Acrylic
Nominal Product Length (mm)	665
Nominal Product Width (mm)	110
Nominal Product Height (mm)	78
Weight (kg)	1.12


### Packaging

Single packaging type	Carton
Product EAN number	5410288487694
Packaging single length / height (cm)	77.5
Packaging single width (cm)	11.6
Packaging single depth (cm)	8.4
DUN14 (outer)	05410288487694
Units per outer package	1
Packaging outer length / height (cm)	77.5
Packaging outer width (cm)	11.6
Packaging outer depth (cm)	8.4

### Safety data

Optimal operating condition (°C)	-20-40
Dry applications use only	No

## PHOTOMETRY

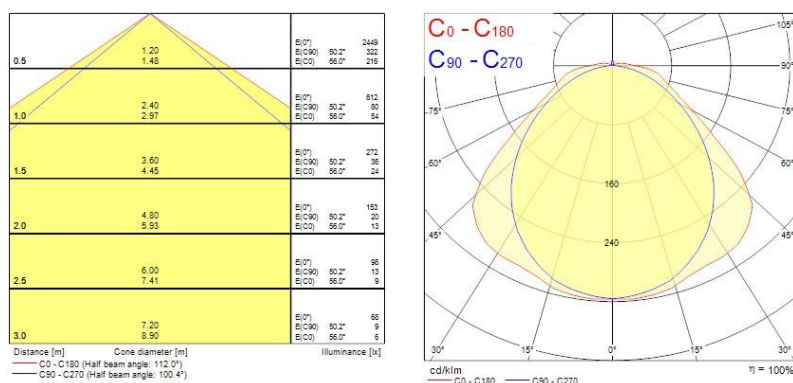

## TECHNICAL DRAWINGS

