

Sylproof Tubular LED - DALI


Sylproof Tubular LED 2X1500 DALI WW

0047609



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

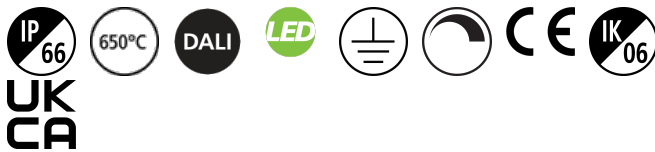


PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1500 DALI WW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Fixture luminous flux (lm)	5597
Luminous flux (lm)	5597
Luminaire efficacy (lm/W)	115.4
LOR (%)	100
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	48.5
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476094

PHOTOMETRY

Sylproof Tubular LED - DALI
Sylproof Tubular LED 2X1500 DALI WW
0047609

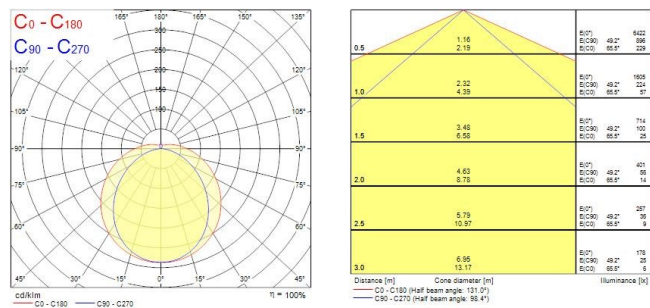

TECHNICAL DRAWINGS

