

T5 FHO Luxline Plus

49W/T5/827 FHO

0002804



Product features

-



PRODUCT OVERVIEW

Product name	49W/T5/827 FHO
Technology	Fluorescent
Watt (Rated) (W)	49
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944524
E-number SE	8356548
E-number Norway	3843426
Luminous flux (lm)	4350
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	88
Colour temperature (K)	2700
Light colour	Homelight
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	49.00
Product Voltage (V)	191
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288028040

DATA TABLE

General data

Product name	49W/T5/827 FHO
Technology	Fluorescent
Watt (Rated) (W)	49
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus

T5 FHO Luxline Plus

49W/T5/827 FHO
0002804

Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number FI	4944524
E-number SE	8356548
E-number Norway	3843426

Optical data

Luminous flux (lm)	4350
Luminous flux (Rated) (lm)	4350
Luminous flux (Nominal) at 35°C (lm)	4900
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	88
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	2700
Light colour	Homelight
Colour Code	827
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Wattage (W)	49.00
Watt (Rated) - High frequency (W)	49.20
Current (A)	0.260
Product Voltage (V)	191
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	260
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	55

T5 FHO Luxline Plus

49W/T5/827 FHO
0002804

Lifetime data

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	1450.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	1449.0
Length base to pin Min-Max (mm) - B	1453.7-1456.1
Max. Lamp Length (mm) - C/L	1463.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.109

Packaging

Single packaging type	Carton
Product EAN number	5410288028040
Packaging single length / height (cm)	146.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288028047
Units per outer package	25
Packaging outer length / height (cm)	148.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5


Safety data

Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY



T5 FHO Luxline Plus
49W/T5/827 FHO
0002804

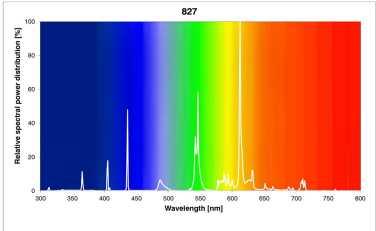

TECHNICAL DRAWINGS

