

Start Track Spot Integral


START Track Spot Integral 5000lm 940 MB WB BLK

0005433



Product features

- Integrated LED spotlight, Textured Black - RAL9005, simple and slick integral design with no driver box and without any visible screws, ideal for retail applications, die-cast aluminium body, passive cooling heatsink. Beam angle: 36°, additional lens 64° beam angle included, color temperature: 4000k, total system power: 54W, total fixture output: 5000 lm, LOR: 100%, colour rendering: Ra: 90 typical, IR/UV free light source without heat radiation, operating voltage: 220-240V / 50-60Hz, drive current: 1400mA, electronic driver, non-dimmable, ultra low LED flickering rate (5% or less), power factor: >0.90, electrical protection: Class I, Global Track 3 Circuit GA69 adapter suitable for Global trac 3-circuit tracks, ingress protection rating: IP20, suitable for internal environment only, horizontal rotation: 345°, vertical tilt: 90°, dimensions: Ø91x148x303, weight: 1,265kg.

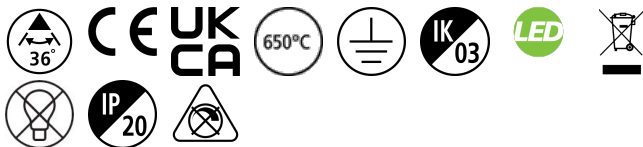

PRODUCT OVERVIEW

Product name	START Track Spot Integral 5000lm 940 MB WB BLK
Technology	LED
Housing	Aluminium
Mount	Track mounting
Environment	Indoor
General application	Retail
ETIM Class	EC001744
E-number FI	4276976
Warranty	5 years
Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	93
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1
Total power consumption (W)	54
Electrical protection	Class I
Dimmable	No
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK03
Product EAN number	5410288054339

DATA TABLE

General data

Product name	START Track Spot Integral 5000lm 940 MB WB BLK
Technology	LED

Start Track Spot Integral

START Track Spot Integral 5000lm 940 MB WB BLK

0005433

Housing	Aluminium
Mount	Track mounting
Environment	Indoor
General application	Retail
Operating temperature range (°C)	-20°C - 40°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001744
E-number FI	4276976
Warranty	5 years

Optical data

Fixture luminous flux (lm)	5000
Luminaire efficacy (lm/W)	93
Colour temperature (K)	4000
Colour Code	940
Light colour	Neutral White
CRI (Ra)	90
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	36
Photobiological Risk Group	RG1

Electrical data

Total power consumption (W)	54
Current (A)	0.24
Mains voltage (V)	220-240V~
Lamp power factor	0.9
THD (at 230 V, 50 Hz, full load, at 100% dimming level) xx.x %	20
Electrical protection	Class I
Dimmable	No
Drive current (mA)	1400
Inrush Current (A)	8.3
Inrush Duration (µs)	320
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
LED Flickering Rate	Ultra low (5% or less)
Max. Luminaires per 10A C Breaker	20
Max. Luminaires per 13A C Breaker	27
Max. Luminaires per 16A C Breaker	33
Max. Luminaires per 20A C Breaker	41
Max. Luminaires per 10A B Breaker	12
Max. Luminaires per 13A B Breaker	16
Max. Luminaires per 16A B Breaker	20
Max. Luminaires per 20A B Breaker	25

Lifetime data

Lifespan L70 B50	50000
Lifespan L80 B50	48100
Lifespan L80 B20	41000

Start Track Spot Integral

START Track Spot Integral 5000lm 940 MB WB BLK
0005433

Lifespan L80 B10	37700
Lifespan L90 B50	19500
Lifespan L90 B20	17000
Lifespan L90 B10	15900

Physical data

Housing colour	RAL 9005 - Jet black
IP rating	IP20
IK rating	IK03
Diffuser finish	Transparent
Diffuser material	PC Polycarbonate
Nominal Product Length (mm)	303
Nominal Product Width (mm)	148
Nominal Product Height (mm)	91
Weight (kg)	1.265


Packaging

Single packaging type	Carton
Product EAN number	5410288054339
Packaging single length / height (cm)	9.5
Packaging single width (cm)	9.5
Packaging single depth (cm)	31.0
DUN14 (outer)	15410288054336
Units per outer package	6
Packaging outer length / height (cm)	30.5
Packaging outer width (cm)	20.5
Packaging outer depth (cm)	33.0

Safety data

Optimal operating condition (°C)	-20-40
----------------------------------	--------

PHOTOMETRY

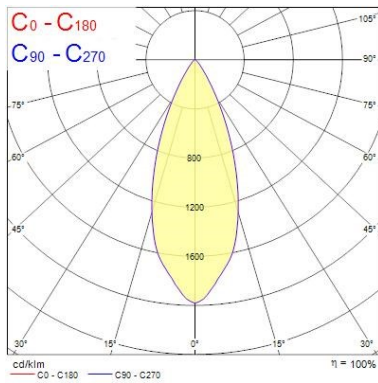


Distance [m]	Cone diameter [m]	E ₀ [lx]	E ₁ [lx]	E ₂ [lx]
0.5	0.36	39636	19818	16515
1.0	0.72	9909	4954	4128
1.5	1.08	4404	2202	1841
2.0	1.44	2477	1238	1036
2.5	1.80	1585	793	663
3.0	2.16	1121	560	468

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 39.6°)

Start Track Spot Integral

START Track Spot Integral 5000lm 940 MB WB BLK
0005433

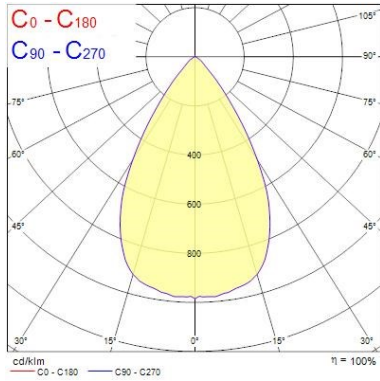

0.5	0.60	E(0°) E(C0)	31.0°	2075 6626
1.0	1.20	E(0°) E(C0)	31.0°	5219 1657
1.5	1.80	E(0°) E(C0)	31.0°	2319 736
2.0	2.40	E(0°) E(C0)	31.0°	1305 414
2.5	3.00	E(0°) E(C0)	31.0°	835 265
3.0	3.61	E(0°) E(C0)	31.0°	580 184

Distance [m] Cone diameter [m] Illuminance [lx]
C0 - C180 (Half beam angle: 62.0°)

TECHNICAL DRAWINGS

