

Brio IP65 LED

BRIO IP55 LED 3k Silver

4054940



PRODUCT OVERVIEW

Product name	BRIO IP55 LED 3k Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
E-number FI	4579236
Colour temperature (K)	3000
Control gear mounting	Integral
Housing colour	Silver
IP rating	IP55
IK rating	IK10
Product EAN number	5026524549400

DATA TABLE

General data

Product name	BRIO IP55 LED 3k Silver
Technology	LED
Housing	Aluminium
Mount	Wall surface mounted
Environment	Exterior Interior
General application	Education, Logistics & Industry, Museums & Galleries, Office
ETIM Class	EC002892
E-number FI	4579236

Optical data

Colour temperature (K)	3000
Correlated colour temperature range (K)	3000 - 3000
Adjustable chromaticity	N
Distribution type	Symmetric

Electrical data

Mains voltage (V)	230V~
-------------------	-------

Brio IP65 LED

BRIO IP55 LED 3k Silver

4054940

Control gear mounting	Integral
Transformer required	Yes
Drive current (mA)	350



Physical data

Housing colour	Silver
IP rating	IP55
IK rating	IK10
Diffuser finish	Opal
Diffuser material	PC Polycarbonate
Reflector finish	White
Nominal Product Length (mm)	408
Nominal Product Width (mm)	358
Weight (kg)	3.0

Packaging

Single packaging type	Carton
Product EAN number	5026524549400
Packaging single length / height (cm)	50.0
Packaging single width (cm)	50.0
Packaging single depth (cm)	20.0
Units per outer package	1
Packaging outer length / height (cm)	50.0
Packaging outer width (cm)	50.0
Packaging outer depth (cm)	20.0

PHOTOMETRY

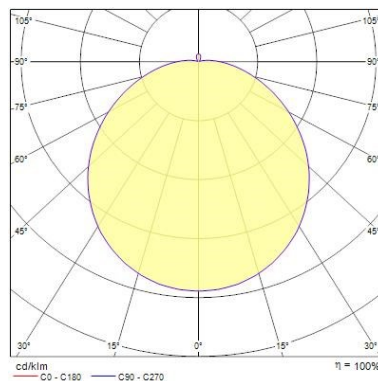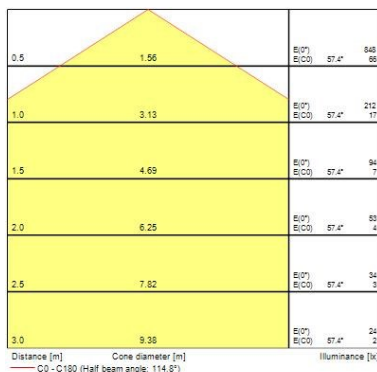

Brio IP65 LED


BRIO IP55 LED 3k Silver

4054940

0.5	1.55	E(0°) E(C0)	57.1°	1555 127
1.0	3.09	E(0°) E(C0)	57.1°	396 32
1.5	4.64	E(0°) E(C0)	57.1°	178 14
2.0	6.18	E(0°) E(C0)	57.1°	99 8
2.5	7.73	E(0°) E(C0)	57.1°	63 5
3.0	9.27	E(0°) E(C0)	57.1°	44 4

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 114.2°)

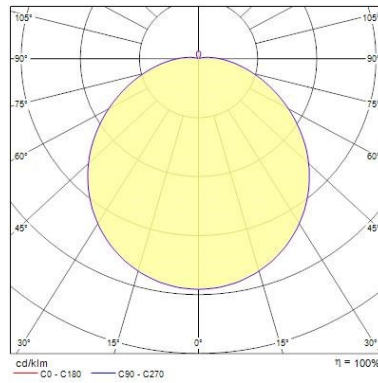

TECHNICAL DRAWINGS

