


Sylproof Tubular LED - Microwave sensor DALI

Sylproof Tubular LED 2X1500 DALI MW NW
0047627



Product features

- Aesthetically attractive and highly efficient LED tubular luminaire, opaque acrylic diffuser, stainless steel end caps and mounting brackets, rapid connector, as Sylvania Sylproof Tubular LED

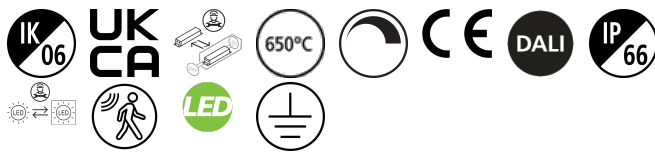


PRODUCT OVERVIEW

Product name	Sylproof Tubular LED 2X1500 DALI MW NW
Technology	LED
Cap/Base	N/A
Housing	Acrylic PMMA
Mount	Ceiling surface mounting
Environment	Interior
General application	Logistics & Industry
ETIM Class	EC000109
Warranty	5 years
Fixture luminous flux (lm)	5821
Luminous flux (lm)	5821
Luminaire efficacy (lm/W)	120.02
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Consistency (SDCM)	3
Photobiological Risk Group	RG0
Total power consumption (W)	48.5
Electrical protection	Class I
Control gear type	Electronic ballast
Dimmable	Yes
Minimum dimming level (%)	90
Housing colour	Transparent
IP rating	IP66
IK rating	IK06
Product EAN number	5410288476278

PHOTOMETRY

Sylproof Tubular LED - Microwave sensor DALI *Sylproof Tubular LED 2X1500 DALI MW NW* 0047627



0.5	1.16 2.15	E(0°) E(90°) E(180°)	9679 932 238
1.0	2.32 4.39	E(0°) E(90°) E(180°)	1870 203 60
1.5	3.48 6.58	E(0°) E(90°) E(180°)	742 104 28
2.0	4.63 8.78	E(0°) E(90°) E(180°)	411 55 15
2.5	5.79 10.97	E(0°) E(90°) E(180°)	267 37 10
3.0	6.95 13.17	E(0°) E(90°) E(180°)	186 26 7

Distance [m] Cone diameter [m] Illuminance [lx]

— C0 - C180 (Half beam angle: 181.0°)
 — C90 - C270 (Half beam angle: 98.4°)

TECHNICAL DRAWINGS

