

T5 FHO Luxline Plus

54W/T5/830 FHO
0002781



Product features



PRODUCT OVERVIEW

Product name	54W/T5/830 FHO
Technology	Fluorescent
Watt (Rated) (W)	54
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5
Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number SE	8356558
E-number Norway	3800914
Luminous flux (lm)	4450
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	82
Colour temperature (K)	3000
Light colour	Warm White
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Photobiological Risk Group	Not applicable
Wattage (W)	54.00
Product Voltage (V)	118
Dimmable	Yes
Average life (Nominal) (h)	24000
Product EAN number	5410288027814

DATA TABLE

General data

Product name	54W/T5/830 FHO
Technology	Fluorescent
Watt (Rated) (W)	54
Lamp shape	Tube, double-ended
Type	T5 FHO Luxline Plus
Cap/Base	G5

T5 FHO Luxline Plus

54W/T5/830 FHO
0002781

Lamp finish	Frosted/Coated
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Retail, Residential & Consumer
ETIM Class	EC000108
E-number SE	8356558
E-number Norway	3800914

Optical data

Luminous flux (lm)	4450
Luminous flux (Rated) (lm)	4450
Luminous flux (Nominal) at 35°C (lm)	5000
Rated lamp efficacy 100h 50Hz at 35°C (lm/W)	82
Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	3000
Light colour	Warm White
Colour Code	830
CRI (Ra)	85
Colour Variation Initial (SDCM)	SDCM5
Adjustable chromaticity	N
Photobiological Risk Group	Not applicable
Rated lumen maint. factor (%) at 2000 h 50Hz	0.97
Rated lumen maint. factor (%) at 4000 h 50Hz	0.95
Rated lumen maint. factor (%) at 6000 h 50Hz	0.93
Rated lumen maint. factor (%) at 8000 h 50Hz	0.92
Rated lumen maint. factor (%) at 12000 h 50Hz	0.91
Rated lumen maint. factor (%) at 16000 h 50Hz	0.90
Rated lumen maint. factor (%) at 20000 h 50Hz	0.88

Electrical data

Wattage (W)	54.00
Watt (Rated) - High frequency (W)	54.20
Current (A)	0.460
Product Voltage (V)	118
Control gear required	Yes
Transformer required	No
Dimmable	Yes
Drive current (mA)	460
Lamp Energy Label (class)	F
kWh per 1000 hours burning time	60

Lifetime data

T5 FHO Luxline Plus

54W/T5/830 FHO

0002781

Average life (Nominal) (h)	24000
Average life (Rated) (h)	24000
Rated survival factor (%) at 2000 h 50Hz	0.99
Rated survival factor (%) at 4000 h 50Hz	0.98
Rated survival factor (%) at 6000 h 50Hz	0.96
Rated survival factor (%) at 8000 h 50Hz	0.94
Rated survival factor (%) at 12000 h 50Hz	0.93
Rated survival factor (%) at 16000 h 50Hz	0.90
Rated survival factor (%) at 20000 h 50Hz	0.84

Physical data

Nominal Product Length (mm)	1150.0
Nominal Product Diameter (mm)	16
Max. Length base to base (mm) - A	1149.0
Length base to pin Min-Max (mm) - B	1153.7-1156.1
Max. Lamp Length (mm) - C/L	1163.2
Max. Lamp Diameter (mm) - D	17.0
Weight (kg)	0.083

Packaging


Single packaging type	Carton
Product EAN number	5410288027814
Packaging single length / height (cm)	116.4
Packaging single width (cm)	1.9
Packaging single depth (cm)	1.9
DUN14 (outer)	15410288027811
Units per outer package	25
Packaging outer length / height (cm)	118.0
Packaging outer width (cm)	10.5
Packaging outer depth (cm)	10.5

Safety data


Lamp mercury content (mg)	2.30
Breakage cleaning instructions	Applicable
Recommendation for disposal at end of life	Applicable
Special purpose lamp	No
Suitable for household illumination	Yes

PHOTOMETRY


T5 FHO Luxline Plus
54W/T5/830 FHO
0002781

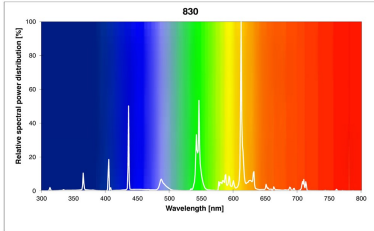

TECHNICAL DRAWINGS



0002781

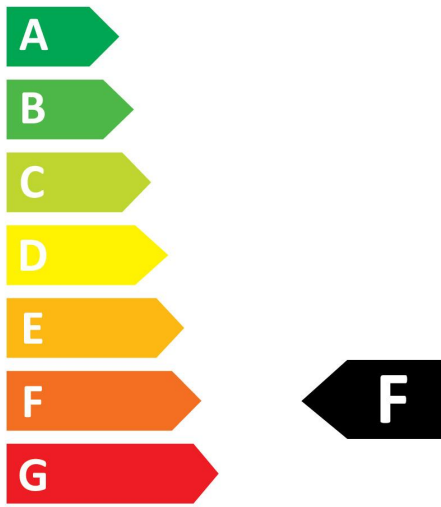

54
kWh/1000h




2019/2015

SYLVANIA

T5 FHO Luxline Plus
54W/T5/830 FHO
0002781



0002781

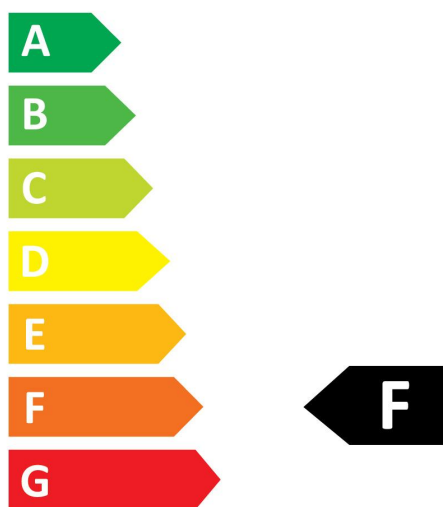

54
kWh/1000h



2019/2015