


## START Panel G4 625x625

START PANEL HO 625 4000K DALI G4  
0047795



### Product features

- LED back-lit recessed panel, 4000K Neutral White, 4750lm delivered from 36W, 132lm/W total system efficiency, energy efficient external DALI dimmable tridonic driver, even distribution of light throughout fixture, Average lifespan: 100.000Hrs, size (HxWxD) 620x620x65mm.

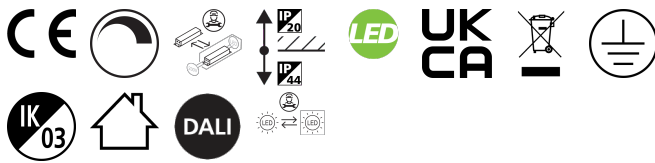

## PRODUCT OVERVIEW

Product name	START PANEL HO 625 4000K DALI G4
Technology	LED
Housing	Steel
Mount	Ceiling recessed mounting
General application	Education, Office
ETIM Class	EC002892
Warranty	5 years
Fixture luminous flux (lm)	4750
Luminaire efficacy (lm/W)	130
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM3
Beam Angle (°)	107
Glare control	< 25
Photobiological Risk Group	RG0
Total power consumption (W)	36
Electrical protection	Class I
Control gear type	LED driver constant current
Dimmable	Yes
Minimum dimming level (%)	1
LED Flickering Rate	Ultra low (5% or less)
Housing colour	RAL 9016 - Traffic white / Bezel
IP rating	IP44/20
IK rating	IK03
Product EAN number	5410288477954


## PHOTOMETRY

## START Panel G4 625x625 START PANEL HO 625 4000K DALI G4 0047795

0.5	1.07 1.42	E:0° E:C90° E:C0°	680 202 284
1.0	3.14 2.99	E:0° E:C90° E:C0°	182 125 145
1.5	4.71 4.48	E:0° E:C90° E:C0°	72 91 85
2.0	6.23 6.98	E:0° E:C90° E:C0°	45 21 35
2.5	7.88 7.47	E:0° E:C90° E:C0°	29 22 27
3.0	9.42 8.98	E:0° E:C90° E:C0°	19 14 18

Distance [m]      Core diameter [m]      Illuminance [lx]

— C0 - C180 (Half beam angle: 115.0°)  
— C90 - C270 (Half beam angle: 115.0°)

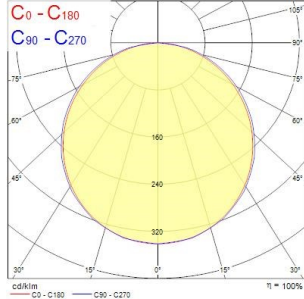

## TECHNICAL DRAWINGS

